

Environmental Product Declaration

according to ISO 14025 and EN 15804



This declaration is for:
CEM II/B-M (S-V) 32,5 N

Provided by:
ENCI B.V.



HEIDELBERGCEMENT Group



program operator

Stichting MRPI®

publisher

Stichting MRPI®

www.mrpi.nl

MRPI® registration

1.1.00152.2020

EPD registration

00001327

date of first issue

28-08-2020

date of this issue

28-08-2020

expiry date

28-08-2025



Nationale

Milieu DATABASE



COMPANY INFORMATION



HEIDELBERGCEMENT Group

ENCI B.V.
Pettelaarpark 30
5216 PD
's-HERTOGENBOSCH
0031 73 640 1220

www.enci.nl

PRODUCT

CEM II/B-M (S-V) 32,5 N

DECLARED UNIT/FUNCTIONAL UNIT

1 metric ton of bulk cement

DESCRIPTION OF PRODUCT

Portland composite cement, clinker content between 65 and 79 %wt. Fly ash / blast furnace slag content between 21 and 35 %wt.

VISUAL PRODUCT



MRPI® REGISTRATION

1.1.00152.2020

EPD REGISTRATION

00001327

DATE OF ISSUE

28-08-2020

EXPIRY DATE

28-08-2025

SCOPE OF DECLARATION

This MRPI®-EPD certificate is verified by **Niels Jonkers, PLUK sustainability**.

The LCA study has been done by **Bob Roijen, SGS INTRON**.

The certificate is based on an LCA-dossier according to ISO14025 and NEN-EN15804+A1. It is verified according to the 'EPD-MRPI® verification protocol May 2017.v3.1'. EPDs of construction products may not be comparable if they do not comply with NEN-EN15804+A1. Declaration of SVHC that are listed on the 'Candidate List of Substances of Very High Concern for authorisation' when content exceeds the limits for registration with ECHA.

PROGRAM OPERATOR

Stichting MRPI®
Kingsfordweg 151
1043GR
Amsterdam

ir. J-P den Hollander, Managing director MRPI®

MORE INFORMATION

www.enci.nl

DEMONSTRATION OF VERIFICATION

CEN standard EN15804 serves as the core PCR[a]

Independent verification of the declaration and data,
according to EN ISO 14025:2010:

internal: external: X

Third party verifier:

Niels Jonkers, PLUK sustainability

[a] PCR = Product Category Rules

DETAILED PRODUCT DESCRIPTION

Cement is produced by intergrinding Portland cement clinker and other constituents. In this EPD only the production of bulk cement is considered. Packaging materials are not included.

COMPONENT (> 1%)	[kg / %]
Portland cement clinker	65 - 79
Fly ash / blast furnace slag	21 - 35
Minor additional constituents	0 - 5

(*) > 1% of total mass

SCOPE AND TYPE

Cement is a hydraulic binder, mainly used for concrete, mortar and cement screed. Since it is semi-finished product, in this EPD only the product stage is included.

The environmental data in this EPD represents an average of cement produced at the product locations of HeidelbergCement in the Netherlands, Belgium and Germany and supplied on the Dutch market.

PRODUCT STAGE			CONSTRUCTION			USE STAGE							END OF LIFE				BENEFITS AND	
			PROCESS										STAGE				LOADS BEYOND THE	
			STAGE														SYSTEM BOUNDARIES	
Raw material supply	Transport	Manufacturing	Transport gate to site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
X	X	X	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA		

X = Module assessed

MNA = Module not assessed

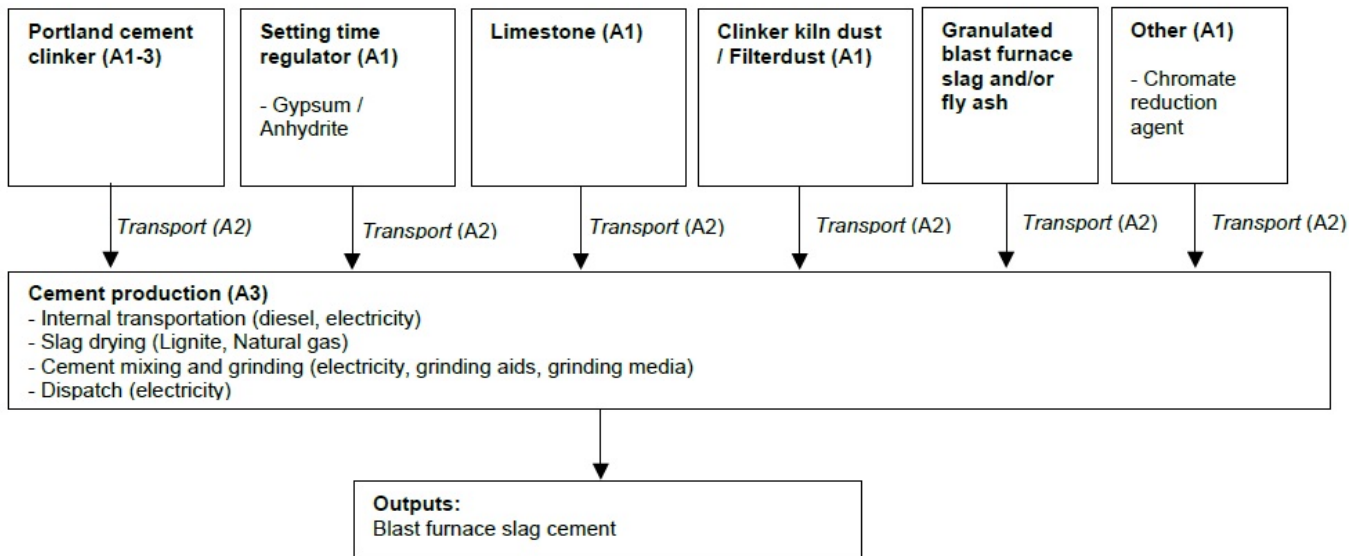


Figure 2.1c Schematic overview of the production of blast furnace slag / composite cements

REPRESENTATIVENESS

The data on this EPD is representative for the production on multiple locations based on the weighted average of product sold on the Dutch market.

The environmental data in this EPD represents an average of cement produced at the production locations of Heidelberg Cement in:

- Lixhe

ENVIRONMENTAL IMPACT per functional unit or declared unit

	UNIT	A1	A2	A3	A1-A3
ADPE	kg Sb-eq.	1.54E-5	6.25E-6	1.73E-5	3.90E-5
ADPF	MJ	1.21E+2	6.19E+1	1.23E+3	1.41E+3
GWP	kg CO ₂ -eq.	7.04E+0	4.53E+0	4.88E+2	5.00E+2
ODP	kg CFC11-eq.	1.11E-6	7.28E-7	5.78E-6	7.62E-6
POCP	kg ethene-eq.	4.34E-3	2.65E-3	3.21E-2	3.91E-2
AP	kg SO ₂ -eq.	3.63E-2	2.80E-2	2.83E-1	3.47E-1
EP	kg (PO ₄) ₃ -eq.	6.08E-3	6.01E-3	7.39E-2	8.60E-2
Toxicity indicators (Dutch market)					
HTP	kg DCB-eq.	2.74E+0	1.29E+0	1.20E+1	1.61E+1
FAETP	kg DCB-eq.	1.17E-1	3.57E-2	2.15E-1	3.68E-1
MAETP	kg DCB-eq.	3.41E+2	1.20E+2	1.34E+3	1.80E+3
TETP	kg DCB-eq.	7.29E-3	5.62E-3	1.15E+0	1.16E+0
Environmental Cost Indicator (Dutch market)					
ECI	Euro	8.55E-1	5.33E-1	2.77E+1	2.91E+1
ADPF in kg Sb-eq. (Dutch market)					
ADPF	kg Sb-eq.	5.72 E -2	3.05 E -2	8.18 E -1	9.05 E -1

ADPE = Abiotic Depletion Potential for non-fossil resources

ADPF = Abiotic Depletion Potential for fossil resources

GWP = Global Warming Potential

ODP = Depletion potential of the stratospheric ozone layer

POCP = Formation potential of tropospheric ozone photochemical oxidants

AP = Acidification Potential of land and water

EP = Eutrophication Potential

HTP = Human Toxicity Potential

FAETP = Fresh water aquatic ecotoxicity potential

MAETP = Marine aquatic ecotoxicity potential

TETP = Terrestrial ecotoxicity potential

ECI = Environmental Cost Indicator

RESOURCE USE per functional unit or declared unit

	UNIT	A1	A2	A3	A1-A3
PERE	MJ	8.32E-1	8.09E-1	2.94E+1	3.10E+1
PERM	MJ	3.95E-1	3.56E-1	3.18E+1	3.26E+1
PERT	MJ	1.23E+0	1.16E+0	6.12E+1	6.36E+1
PENRE	MJ	1.22E+2	7.47E+1	2.31E+3	2.51E+3
PENRM	MJ	0.00	0.00	0.00	0.00
PENRT	MJ	1.22E+2	6.36E+1	1.71E+3	1.89E+3
SM	kg	2.67E+2	0.00	1.26E+1	2.80E+2
RSF	MJ	0.00	0.00	9.50E+2	9.50E+2
NRSF	MJ	0.00	0.00	4.65E+2	4.65E+2
FW	m3	1.13E-2	1.32E-2	8.65E-1	8.89E-1

PERE = Use of renewable energy excluding renewable primary energy resources

PERM = Use of renewable energy resources used as raw materials

PERT = Total use of renewable primary energy resources

PENRE = Use of non-renewable primary energy resources excluding non-renewable energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total use of non-renewable primary energy resources

SM = Use of secondary materials

RSF = Use of renewable secondary fuels

NRSF = Use of non renewable secondary fuels

FW = Use of net fresh water

OUTPUT FLOWS AND WASTE CATEGORIES per functional unit or declared unit

	UNIT	A1	A2	A3	A1-A3
HWD	kg	5.83E-4	4.61E-4	7.14E-3	8.18E-3
NHWD	kg	2.59E-1	1.66E+0	1.23E+0	3.15E+0
RWD	kg	0.00	0.00	0.00	0.00
CRU	kg	0.00	0.00	0.00	0.00
MFR	kg	0.00	0.00	0.00	0.00
MER	kg	0.00	0.00	0.00	0.00
EEE	MJ	0.00	0.00	0.00	0.00
ETE	MJ	0.00	0.00	0.00	0.00

HWD = Hazardous Waste Disposed

NHWD = Non Hazardous Waste Disposed

RWD = Radioactive Waste Disposed

CRU = Components for reuse

MFR = Materials for recycling

MER = Materials for energy recovery

EEE = Exported Electrical Energy

ETE = Exported Thermal Energy

CALCULATION RULES

Virtually no materials or processes have been excluded from the study (cut-of rule is well below 1%). Refractories, grinding media and grinding aids are included. Primary data at the production location of HeidelbergCement where collected in 2019-2020 from base year 2018.

The “production” of secondary fuels and materials is allocated to the previous life cycle. Transportation to the production site of heidelbergCement is allocated to the production of cement. Also, the emissions from the combustion of secondary fuels for clinker production are allocated to the cement production. Biogenic CO₂ emissions are not included.

The LCA calculations are made using the Ecoinvent database v3.4. Infrastructure processes in Ecoinvent processes have been included, long term emissions in Ecoinvent processes have been excluded from the LCA calculations.

SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION

Module A1:

This module includes the supply of raw materials and fuels.

Module A2:

This module includes the transport of raw materials and fuels to the cement plant.

Module A3:

This module includes the grinding of the raw materials, the production of the clinker and the processing and blending of the cement constituents.

DECLARATION OF SVHC

No substances that are listed in the latest “Candidate List of Substances of Very High Concern for authorisation” are included in the product that exceeds the limit for registration.

REFERENCES

Stichting Bouwkwiteit, Bepalingsmethode Milieuprestatie Gebouwen en GWW Werken versie 3.0.

SGS INTRON report: A104910/R20200100, june 2020

REMARKS

None