Environmental Product Declaration according to ISO 14025 and EN 15804



This declaration is for:

Basalt Fibre Reinforced Polymer Rebar, 8mm

Provided by:

Orlimex CZ s.r.o.





program operator
Stichting MRPI®
publisher
Stichting MRPI®
www.mrpi.nl

MRPI® registration
1.1.00241.2021
date of first issue
27-10-2021
date of this issue
27-10-2021
expiry date
27-10-2026











COMPANY INFORMATION



Orlimex CZ s.r.o. Osík 50 56967 Osík 00420 731 416 285 Alexander Bobryshev



PRODUCT

Basalt Fibre Reinforced Polymer Rebar, 8mm



DECLARED UNIT/FUNCTIONAL UNIT

The production of 1 kilogram of product for use as BFRP mesh



DESCRIPTION OF PRODUCT

Basalt Fibre Reinforced Novmer (BFRP) mesh serves as the eplacement of reinforcement stall mesh used in concrete constactions.







MRPI® REGISTRATION

1.1.00241.2021

www.orlimex.cz

DATE OF ISSUE 27-10-2021

EXPIRY DATE 27-10-2026



MORE INFORMATION

www.orlimex.cz



SCOPE OF DECL RATIO

This MRPI®-EPD certific e is erified by Anne Kees Jeeninga, Advieslab v.o.f..

The LCA study be been don by Ruben van Gaalen, EcoReview B.V. .

The certificators based on an Landossier according to ISO14025 and EN15804+A2 (incl. A1). It is verified according to the 'MF of Representation protocol November 2020.v4.0'. EPDs of construction products may not be comparate if the do not comply with EN15804+A2 (incl. A1). Declaration of SVHC that are listed on the 'Candidate vist of Supervices of Very High Concern for authorisation' when content exceeds the limits for the sistence of the content of the CHA.



PROGRAM OPERATOR

Stichting MRPI® Kingsfordweg 151 1043GR Amsterdam



ir. J-P den Hollander, Managing director MRPI®

DEMONSTRATION OF VERIFICATION CEN standard EN15804 serves as the core PCR[a] Independent verification of the declaration and data,

according to EN ISO 14025:2010:

internal: external: X



Anne-Kees Jeeninga, Advieslab v.o.f.

[a] PCR = Product Category Rules







For the production of BFRP Basalt Roving is purchased, this is basalt rock which has been crushed and melted and then put on a bundle of continues unidirectional complex basalt fibres. These basalt roving are pulled through a bath of resin to impregnate them after which it's heated and dyed to finally undergo polymerization. This process is called pultrusion. After the pultrusion process the BFRP are being sand coated, netted and made with a diameter of 8mm. Then it's shipped to Orlimex in Czech Republic for distribution.

COMPONENT (> 1%)	[kg / %]
Basalt	75%
Resin	10%
Silica Sand	14%


(*) > 1% of total mass

SCOPE AND TYPE

The type of this EPD is Cradle-to-Gate (A1-A3). It major steps from the extraction of natural resources to the factory gate are included in the environmental performance of the manufacturing phase, except those that are not relevant to the any commental performance of the product. It is not determined as to how the BFR have to be processed at the end of life (after 50 years). Therefore, this module is not considered in this CA sturk.

The software Simapro is used to perform the CA.ckground databases used are:

• Ecoinvent (v3.6)

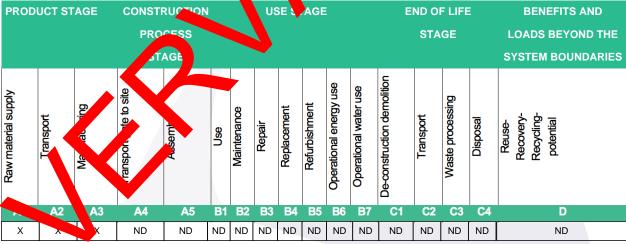


X = Modules Assessed

ND = Not Declared







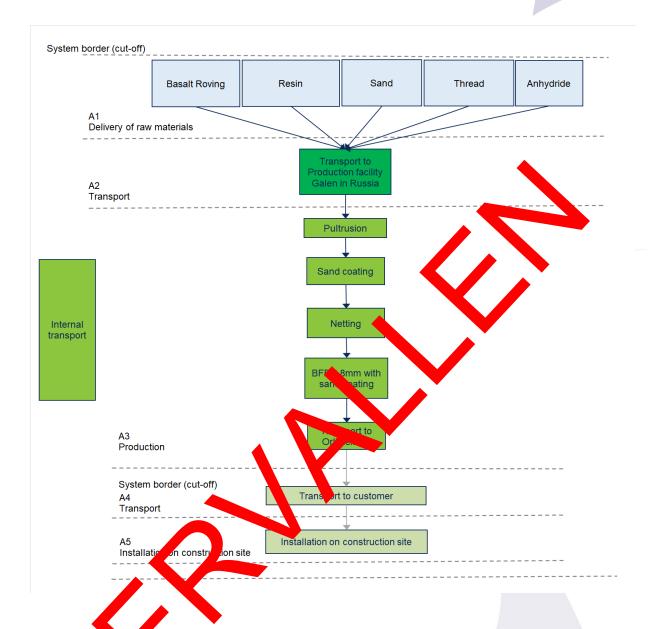

Lure: LCA process diagram according to EN 15804 (7.2.1)

PRESE TATIVENESS

This Er list presentative for products produced and sold in the EU. The BFRP is produced in one production site of Galen in Cheboksary, Russia.










ENVIRONMENTAL IMPACT per functional unit or declared unit (indicators A1)

	UNIT	A1	A2	А3	A1-A3
ADPE	kg Sb. eq.	1.16E-5	1.19E-5	1.19E-6	2.46E-5
ADPF	MJ	3.83E+1	7.11E+0	7.51E+0	5.29E+1
GWP	kg CO2 eq.	2.12E+0	4.65E-1	4.92E-1	3.08E+0
ODP	kg CFC 11 eq.	2.63E-7	8.25E-8	4.75E-8	3.92E-7
POCP	kg ethene eq.	8.85E-4	2.80E-4	3.14E-4	1.48E-3
AP	kg SO2 eq.	5.90E-3	2.04E-3	1.86E-3	9.80E-3
EP	kg (PO4)3- eq.	8.12E-4	4.01E-4	1.90E-4	1.40E-3



НТР	kg DCB-eq.	8.45E-1	1.96E-1	1.75E-1	1.22E+0
FAETP	kg DCB-eq.	1.49E-1	5.71E-3	1.50E-3	, ₹E-1
MAETP	kg DCB-eq.	2.83E+1	2.05E+1	7.14E+0	5.60E+
TETP	kg DCB-eq.	4.28E-3	6.92E-4	2.11	7.08E-3
ECI	Euro	2.20E-1	6.00F	5.00E-2	3,7 _41
ADPF	kg Sb. eq.	1.84E-2	3.42E-3	37 -	2.54E-2

ADPE = Abiotic Depletion Potential for non-fossion sources

ADPF = Abiotic Depletion Potential for fossil resources

GWP = Global Warming Potential

ODP = Depletion potential of the stratosphe. Sone ver

POCP = Formation potential of open heric ozone pochemical oxidants

AP = Acidification Potential and an water

EP = Eutrophication Pote al

HTP = Human Toxicity Pote

FAETP = Fresh war aquatic entoxicity potential

MAETP = Marin aquatic ecotoxic otential

TETP = Terr (ial ecot (city potential

ECI = Environmental ost Indica

ADPF = A tic Deption Potential for fossil resources expressed in [kg Sb-eq.]

ND = Not D lared









ENVIRONMENTAL IMPACT per functional unit or declared unit (core indicators A2)

	UNIT	A1	A2	А3	A1-A3
GWP-total	kg CO2 eq.	2.17E+0	4.69E-1	5.09E-1	3.14E+0
GWP-fossil	kg CO2 eq.	2.16E+0	4.69E-1	5.08E-1	3.14E+0
GWP-biogenic	kg CO2 eq.	5.39E-6	2.16E-4	-1.35E-4	8.69E-5
GWP-luluc	kg CO2 eq.	2.62E-3	1.72E-4	1.32E-3	4.10E-3
ODP	kg CFC11 eq.	2.74E-7	1.03E-7	4.56E-8	4.23E-7
AP	mol H+ eq.	7.05E-3	2.72E-3	2.18E-3	1.20E-2
EP-freshwater	kg PO4 eq.	6.74E-5	4.73E-6	2.73E-5	9.94E-5
EP-marine	kg N eq.	1.18E-3	9.58E-4	4.11E-4	2.54E-3
EP-terrestrial	mol N eq.	1.31E-2	1.06E-2	3.31E-3	2.70E-2
POCP	kg NMVOC eq.	4.65E-3	3.02E-3	1.60E-3	9. ₹-3
ADP-minerals& metals	kg Sb eq.	1.16E-5	1.19E-5	1.19E-6	2.46E-5
ADP-fossil	MJ, net calorific value	3.64E+1	7.07E+0	7.94L	5.14E+1
WDP	m3 world eq. deprived	4.43E-1	2.53E	9.87E-2	<i>≟</i> -1

GWP-total = Global Warming Potential total

GWP-fossil = Global Warming Potential fossil fu

GWP-biogenic = Global Warming Potential bioge

GWP-luluc = Global Warming Potential land use all land use hange

ODP = Depletion potential of the stratos ozone gyer

AP = Acidification Potential, Accidented Excelent

EP-freshwater = Eutrophication Potential, fraction of nutrients reaching freshwater end compartment

EP-marine = Eutrophication of nutrients reaching marine end compartment

EP-terrestrial = Eutrophica Pot Man, Po

POCP = Formation pential pospheric ozone photochemical oxidants

ADP-minerals&mals = Abiotic Letion Potential for non fossil resources [2]

ADP-fossil = Apolic Depleon for for resources potential [2]

WDP = Water ser) derivation potential, deprivation-weighted water consumption [2]

ND = Not eclare

Disclaimer

The results of his environmental impact indicator shall be used with care as the uncertainties on these results are high or as the limited reperienced with the indicator.









ENVIRONMENTAL IMPACT per functional unit or declared unit (additional indicators A2)

	UNIT	A1	A2	А3	A1-A3
PM	Disease incidence	3.51E-8	4.21E-8	2.65E-8	1.04E-7
IRP	kBq U235 eq.	1.11E-1	2.96E-2	5.43E-2	1.95E-1
ETP-fw	CTUe	3.23E+1	6.30E+0	3.29E+0	4.19E+1
HTP-c	CTUh	1.10E-9	2.05E-10	3.21E-10	1.62E-9
HTP-nc	CTUh	1.35E-8	6.89E-9	3.06E-9	2.34E-8
SQP		4.82E+0	6.13E+0	2.87E-1	1.12E+1

PM = Potential incidence of disease due to PM emissions

IRP = Potential Human exposure efficiency relative to U235 [1]

ETP-fw = Potential Comparative Toxic Unit for ecosystems [2]

HTP-c = Potential Comparative Toxic Unit for humans [2]

HTP-nc = Potential Comparative Toxic Unit for humans, non-cancer [2]

SQP = Potential soil quality index [2]

ND = Not Declared

Disclaimer [1]

This impact category deals mainly with the eventual impact of lowerse ionizing regiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, a supational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing region the solution radon and from some construction materials is also not measured by this indicator.

Disclaimer [2]

The results of this environmental impact indicator hall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.









RESOURCE USE per functional unit or declared unit (A1 / A2)

	UNIT	A1	A2	А3	A1-A3
PERE	MJ	1.30E+0	8.85E-2	5.13E-1	1.91E+0
PERM	MJ	0.00	0.00	0.00	0.00
PERT	MJ	1.30E+0	8.85E-2	5.13E-1	1.91E+0
PENRE	MJ	3.96E+1	7.51E+0	8.56E+0	5.56E+1
PENRM	MJ	0.00	0.00	0.00	0.00
PENRT	MJ	3.96E+1	7.51E+0	8.56E+0	5.56E+1
SM	kg	0.00	0.00	0.00	0.00
RSF	MJ	0.00	0.00	0.00	0.00
NRSF	MJ	0.00	0.00	0.00	0.00
FW	m3	1.99E-2	8.61E-4	7.56E-3	2.83E-2

PERE = Use of renewable energy excluding renewable primary energy resource.

PERM = Use of renewable energy resources used as raw materials

PERT = Total use of renewable primary energy resources

PENRE = Use of non-renewable primary energy resources excluding on-renewable energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as rate and

PENRT = Total use of non-renewable primary energy

SM = Use of secondary materials

RSF = Use of renewable secondary fuels

NRSF = Use of non renewable secondary fuels

FW = Use of net fresh water

ND = Not Declared

OUTPUT FLOWS AND WASTE CATEGORIES per functional unit or declared unit (A1 / A2)

	UNI	A L	A2	А3	A1-A3
HWD	kg	3.75E-5	1.79E-5	8.67E-6	6.41E-5
NHWD		8.99E-2	4.48E-1	1.61E-2	5.54E-1
RWD	kg	6.91E-5	4.64E-5	2.85E-5	1.44E-4
CRU	kg	0.00	0.00	0.00	0.00
	kg	0.00	0.00	0.00	0.00
MER	kg	0.00	0.00	0.00	0.00
EEE	MJ	0.00	0.00	0.00	0.00
ETE	MJ	0.00	0.00	0.00	0.00

HWD = Hazardous Waste Disposed

RWD = Radioactive Waste Disposed

MFR = Materials for recycling

EEE = Exported Electrical Energy

ND = Not Declared

NHWD = Non Hazardous Waste Disposed

CRU = Components for reuse

MER = Materials for energy recovery

ETE = Exported Thermal Energy









BIOGENIC CARBON CONTENT per functional unit or declared unit (A2)

	UNIT	A1	A2	А3	A1-A3
BCCpr	kg C	0.00	0.00	0.00	0.00
ВССра	kg C	0.00	0.00	0.00	0.00

BCCpr = Biogenic carbon content in product BCCpa = Biogenic carbon content in packaging

ND = Not Declared



CALCULATION RULES

Data quality

Data flows have been modeled as realistically as possible. Data callity accessment is based on the principle that the primary data used for processes occurring at the production size is selected in the first instance. Where this is not available, other reference data is selected to propriet appropriate sources.

Data collection period

The dataset is representative for the production processes used in the control of the production processes used in the control of the production processes used in the control of the production processes used in the proce

Methodology and reproducibility

The process descriptions and quantities in this lady are neededucible in accordance to the reference standards that have been used. The references of an across, both primary and public sources and literature, have been documented. In addition, cracilitate the reproducibility of this LCA, a full set of data records has been generated. This lata policio contains a summary of all the data used in this LCA.



SCENARIOS AND A JIN NAL TECHNICAL INFORMATION

A1. Raw materials supply

This module considers the polices including the melting, crushing and processing of basalt roving by supplier to Galan.

A2. Transpoor of my materials to manufacturer

This includes it transport distance of the raw material to the manufacturing facility via road, boat and/or tra

A3. Ivia. fac ring

This module covers the manufacturing of the BFRP and includes all processes linked to production such as pultrusion, this is the process where basalt roving are pulled through a bath of resin to impregnate them after which it's heated and dyed to finally undergo polymerization.

Use of electricity and natural gas have been taken into account. The transport from Galen production facility to Orlimex in Czech Republic is included in A3. Is produced and certified in accordance with EN ISO/IEC 17067 standard.









DECLARATION OF SVHC

None of the substances contained in the product are listed in the "Candidate List of Substances of Very High Concern for authorisation", or they do not exceed the threshold with the European Chemicals Agency.



REFERENCES

• CML - Department of Industrial Ecology, CML-IA Characterisation Factors, Dated August 2016, Leiden University, Leiden, Netherlands Available at:

https://www.universiteitleiden.nl/en/research/research-output/science/cml-ia-characterisa-n-factors

- Simapro 9.1.1.1
- EN 15804: Sustainability of construction works Environmental product declarations Core rules for the product category of construction products', I.S. EN 15804:2012 1:2013 and En 15804+A2:2019.
- ISO 14040: Environmental management Life cycle assessment Principles and Framework', International Organization for Standardization, ISO14040:2006.
- ISO 14044: Environmental management Life cycle assessment Requirements and guidelines', International Organization for Standardization, ISO14044:22.6.
- ISO 14025: Environmental labels and declarations -- Type III vironmental declarations -- Principles and procedures', International Organization for Standardization, IS 2025:2006.
- NEN-EN 15804+A2 and NMD Bepalingsmethode Recuprestation on bouwwerken 1.0



REMARKS

None

