









Orlimex CZ s.r.o.
Osík 50
56967
Osík
00420 731 416 285
Alexander Bobryshev
www.orlimex.cz

MRPI® REGISTRATION

PRODUCT

Basalt Fibre Reinforced Polymer Rebar, 6mm

DECLARED UNIT/FUNCTIONAL UNIT

The production of 1 kilogram of product for use as $\ensuremath{\mathsf{BFRP}}$ mesh

DESCRIPTION OR PRODUCT

Basalt Fibre Reinforced Novmer (BFRP) mesh serves as a server to replacement of reinforcement server mesh used in concrete constructions.



DATE OF ISSUE 27-10-2021

1.1.00242.2021

EXPIRY DATE 27-10-2026

MORE INFORMATION

www.orlimex.cz


SCOPE OF DECL KATIO

This MRPI®-EPD certific to is certified by **Anne Kees Jeeninga**, **Advieslab v.o.f.**. The LCA study has been doubly **Ruben van Gaalen**, **EcoReview B.V.**. The certificators based on an Londossier according to ISO14025 and EN15804+A2 (incl. A1). It is verified according to the 'MF 1®-EPD verification protocol November 2020.v4.0'. EPDs of construction products may not be comparable if the ido not comply with EN15804+A2 (incl. A1). Declaration of SVHC that are listed on the 'Candidated ist of Science con Very High Concern for authorisation' when content exceeds the limits for instration with ECHA.

PROGRAM OPERATOR

Stichting MRPI® Kingsfordweg 151 1043GR Amsterdam

ir. J-P den Hollander, Managing director MRPI®

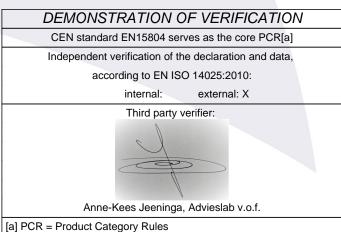



A1) MRPI milieu relevante product informatie

DETAILED PRODUCT DESCRIPTION

For the production of BFRP Basalt Roving is purchased, this is basalt rock which has been crushed and melted and then put on a bundle of continues unidirectional complex basalt fibres. These basalt roving are pulled through a bath of resin to impregnate them after which it's heated and dyed to finally undergo polymerization. This process is called pultrusion. After the pultrusion process the BFRP are being sand coated, netted and made with a diameter of 6mm. Then it's shipped to Orlimex in Czech Republic for distribution.

COMPONENT (> 1%)	[kg / %]					
Basalt	80%					
Resin	9%					
Silica Sand	10%					
(*) > 10/ of total mass						

(*) > 1% of total mass

SCOPE AND TYPE

The type of this EPD is Cradle-to-Gate (A1-A3). It major steps from the extraction of natural resources to the factory gate are included in the environmental performance of the manufacturing phase, except those that are not relevant to the product. It is not determined as to how the BFR pare to be processed at the end of life (after 50 years). Therefore, this module is not considered in this CA sturk.

The software Simapro is used to perform the CA. A software Simapro is used are:

• Ecoinvent (v3.6)


PROD	UCT ST	TAGE	CONS	TRUCTION			U	SE 🔪	AGE			E		F LIFE	Ξ	BENEFITS AND
PROCESS								STAGE			LOADS BEYOND THE					
JTAGE											SYSTEM BOUNDARIE					
Raw material supply	Transport	Me vat ing	ransport de lo site	Ausemb	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse- Recovery- Recycling- potential
	A2	A	A4	A5	B 1	B2	B 3	B4	B 5	B6	B7	C1	C2	C3	C4	D
Х		X	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

X = Modules Assessed

ND = Not Declared





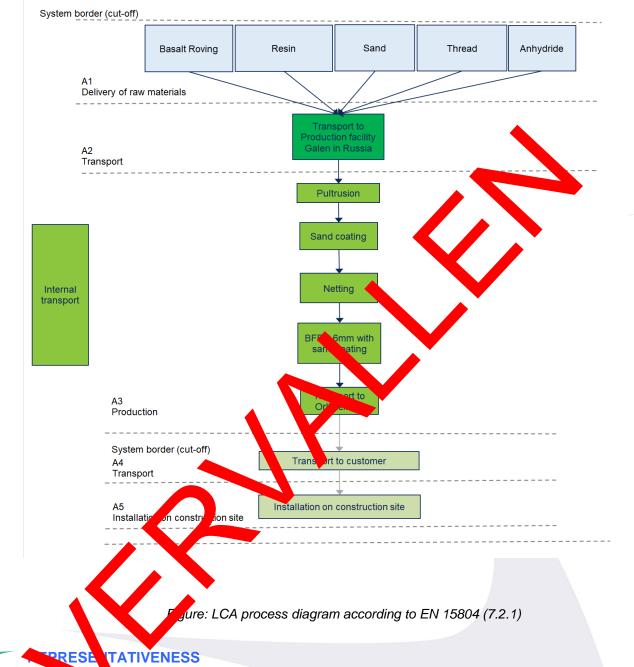

This Error is upresentative for products produced and sold in the EU. The BFRP is produced in one production site of Galen in Cheboksary, Russia.



milieu relevante product informatie





	UNIT	A1	A2	A3	A1-A3
ADPE	kg Sb. eq.	1.07E-5	1.20E-5	1.19E-6	2.39E-5
ADPF	MJ	3.89E+1	7.19E+0	7.51E+0	5.36E+1
GWP	kg CO2 eq.	2.16E+0	4.70E-1	4.92E-1	3.12E+0
ODP	kg CFC 11 eq.	2.67E-7	8.34E-8	4.75E-8	3.98E-7
POCP	kg ethene eq.	8.53E-4	2.84E-4	3.14E-4	1.45E-3
AP	kg SO2 eq.	5.89E-3	2.07E-3	1.86E-3	9.82E-3
EP	kg (PO4)3- eq.	7.92E-4	4.06E-4	1.90E-4	1.39E-3

Toxicity indicators and ECI (Dutch market)

HTP	kg DCB-eq.	7.83E-1	1.98E-1	1.75E-1	1.16E+0
FAETP	kg DCB-eq.	1.35E-1	5.78E-3	1.50E-3	9E-1
MAETP	kg DCB-eq.	2.78E+1	2.08E+1	7.14E+0	5.57E+
TETP	kg DCB-eq.	4.43E-3	6.99E-4	2.11	7.24E-3
ECI	Euro	2.20E-1	6.00F	5.00E-2	371
ADPF	kg Sb. eq.	1.87E-2	3.46E-3	35	2.57E-2

ADPE = Abiotic Depletion Potential for non-fossing source ADPF = Abiotic Depletion Potential for fossil resources

GWP = Global Warming Potential

ODP = Depletion potential of the stratosphe.

POCP = Formation potential of open heric ozone chemical oxidants

AP = Acidification Potential and an water

EP = Eutrophication Poter al

ADPF = A

ND = Not D

HTP = Human Toxicity Potential FAETP = Fresh war aquatic a toxicity potential

MAETP = Marin aquatic ecotoxics potential

TETP = Terr tial ecot city potential

ECI = Environn, tak ost Indica

lared

ptic De, tion Potenal for fossil resources expressed in [kg Sb-eq.]

ver



milieu relevante product informatie



ENVIRONMENTAL IMPACT per functional unit or declared unit (core indicators A2)

	UNIT	A1	A2	A3	A1-A3
GWP-total	kg CO2 eq.	2.20E+0	4.74E-1	5.09E-1	3.19E+0
GWP-fossil	kg CO2 eq.	2.20E+0	4.74E-1	5.08E-1	3.18E+0
GWP-biogenic	kg CO2 eq.	-1.30E-5	2.19E-4	-1.35E-4	7.09E-5
GWP-luluc	kg CO2 eq.	2.73E-3	1.74E-4	1.32E-3	4.22E-3
ODP	kg CFC11 eq.	2.79E-7	1.05E-7	4.56E-8	4.29E-7
AP	mol H+ eq.	7.04E-3	2.75E-3	2.18E-3	1.20E-2
EP-freshwater	kg PO4 eq.	6.83E-5	4.78E-6	2.73E-5	1.00E-4
EP-marine	kg N eq.	1.17E-3	9.69E-4	4.11E-4	2.55E-3
EP-terrestrial	mol N eq.	1.30E-2	1.07E-2	3.31E-3	2.70E-2
POCP	kg NMVOC eq.	4.57E-3	3.05E-3	1.60E-3	93
ADP-minerals& metals	kg Sb eq.	1.07E-5	1.20E-5	119E-6	2.39E-5
ADP-fossil	MJ, net calorific value	3.70E+1	7.15E+0	7.94	5.21E+1
WDP	m3 world eq. deprived	4.26E-1	2.56E	9.87E-2	E-1

GWP-total = Global Warming Potential total

GWP-fossil = Global Warming Potential fossil fu

GWP-biogenic = Global Warming Potential bioge

GWP-luluc = Global Warming Potential land use al land us hange ayer

ODP = Depletion potential of the stratos, c ozone AP = Acidification Potential, Acc ated Exce

I, fraction of nutrients reaching freshwater end compartment EP-freshwater = Eutrophicati Poter Potential EP-marine = Eutrophication action of nutrients reaching marine end compartment EP-terrestrial = Eutrophica n Pot lated Exceedence POCP = Formation tential pospheric ozone photochemical oxidants ADP-minerals&m_als = Abiotic L letion Potential for non fossil resources [2] ptic Depleton for for resources potential [2] ADP-fossil = WDP = Water ser) d rivation potential, deprivation-weighted water consumption [2]

ND = Not eclare

Disclaimer

th

The results of is environmental impact indicator shall be used with care as the uncertainties on these results are high or as limited perienced with the indicator.



milieu relevante product informatie



ENVIRONMENTAL IMPACT per functional unit or declared unit (additional indicators A2)

	UNIT	A1	A2	A3	A1-A3
PM	Disease incidence	3.32E-8	4.26E-8	2.65E-8	1.02E-7
IRP	kBq U235 eq.	1.16E-1	3.00E-2	5.43E-2	2.00E-1
ETP-fw	CTUe	3.03E+1	6.38E+0	3.29E+0	4.00E+1
HTP-c	CTUh	1.02E-9	2.07E-10	3.21E-10	1.55E-9
HTP-nc	CTUh	1.31E-8	6.97E-9	3.06E-9	2.31E-8
SQP		4.80E+0	6.20E+0	2.87E-1	1.13E+1

PM = Potential incidence of disease due to PM emissions

IRP = Potential Human exposure efficiency relative to U235 [1]

ETP-fw = Potential Comparative Toxic Unit for ecosystems [2]

HTP-c = Potential Comparative Toxic Unit for humans [2]

HTP-nc = Potential Comparative Toxic Unit for humans, non-cancer [2]

SQP = Potential soil quality index [2]

ND = Not Declared

Disclaimer [1]

This impact category deals mainly with the eventual impact of low-see ionizing reliation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, suppational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing reliation from the source in radon and from some construction materials is also not measured by this indicator.

Disclaimer [2]

The results of this environmental impact indicator wall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.



milieu relevante product informatie





RESOURCE USE per functional unit or declared unit (A1 / A2)

	UNIT	A1	A2	A3	A1-A3
PERE	MJ	1.32E+0	8.95E-2	5.13E-1	1.92E+0
PERM	MJ	0.00	0.00	0.00	0.00
PERT	MJ	1.32E+0	8.95E-2	5.13E-1	1.92E+0
PENRE	MJ	4.03E+1	7.59E+0	8.56E+0	5.65E+1
PENRM	MJ	0.00	0.00	0.00	0.00
PENRT	MJ	4.03E+1	7.59E+0	8.56E+0	5.65E+1
SM	kg	0.00	0.00	0.00	0.00
RSF	MJ	0.00	0 0.00 0.00		0.00
NRSF	MJ	0.00	0.00	0.00	0.00
FW	m3	2.00E-2	8.71E-4	7.56E-3	2.84E-2

PERE = Use of renewable energy excluding renewable primary energy resource

PERM = Use of renewable energy resources used as raw materials

PERT = Total use of renewable primary energy resources

on-renew e energy resources used as raw materials PENRE = Use of non-renewable primary energy resources exclude PENRM = Use of non-renewable primary energy resources used as ra mate ١S

PENRT = Total use of non-renewable primary energy

SM = Use of secondary materials

RSF = Use of renewable secondary fuels

NRSF = Use of non renewable secondary fuels

FW = Use of net fresh water

ND = Not Declared

OUTPUT FLOWS A NWA

TE CATEGORIES per functional unit or declared unit (A1 / A2)

	UNN		A2	A3	A1-A3
HWD	kg	3.90E-5	1.81E-5	8.67E-6	6.58E-5
NHWD		8.64E-2	4.53E-1	1.61E-2	5.56E-1
RWD	kg	7.15E-5	4.69E-5	2.85E-5	1.47E-4
CRU	ks	0.00	0.00	0.00	0.00
	kg	0.00	0.00	0.00	0.00
MER	kg	0.00	0.00	0.00	0.00
EEE	MJ	0.00	0.00	0.00	0.00
ETE	MJ	0.00	0.00	0.00	0.00

HWD = Hazardous Waste Disposed

RWD = Radioactive Waste Disposed

MFR = Materials for recycling

EEE = Exported Electrical Energy

ND = Not Declared

NHWD = Non Hazardous Waste Disposed CRU = Components for reuse MER = Materials for energy recovery ETE = Exported Thermal Energy







BIOGENIC CARBON CONTENT per functional unit or declared unit (A2)

	UNIT	A1	A2	A3	A1-A3
BCCpr	kg C	0.00	0.00	0.00	0.00
BCCpa	kg C	0.00	0.00	0.00	0.00

BCCpr = Biogenic carbon content in product BCCpa = Biogenic carbon content in packaging ND = Not Declared



CALCULATION RULES

Data quality

Data flows have been modeled as realistically as possible. Data cality ar essment is based on the principle that the primary data used for processes occurring at the primaction size is selected in the first instance. Where this is not available, other reference data is selected to proprior appropriate sources.

Data collection period

The dataset is representative for the production processes used in

Methodology and reproducibility

The process descriptions and quantities in this ordy are neoducible in accordance to the reference standards that have been used. The references of an encoducible in accordance to the references and literature, have been documented. In addition, a racilitate the reproducibility of this LCA, a full set of data records has been generated. This lata por folio contains a summary of all the data used in this LCA.



SCENARIOS AND ALOT NAL TECHNICAL INFORMATION

A1. Raw materials stuply

This module considers all a popliers meluding the melting, crushing and processing of basalt roving by supplier to Galar.

A2. Transport of materials to manufacturer

This includes the transmitt distance of the raw material to the manufacturing facility via road, boat and/or transmitted and/or

A3. Ivia fac ving

This module covers the manufacturing of the BFRP and includes all processes linked to production such as pultrusion, this is the process where basalt roving are pulled through a bath of resin to impregnate them after which it's heated and dyed to finally undergo polymerization.

Use of electricity and natural gas have been taken into account. The transport from Galen production facility to Orlimex in Czech Republic is included in A3. Is produced and certified in accordance with EN ISO/IEC 17067 standard.







DECLARATION OF SVHC

None of the substances contained in the product are listed in the "Candidate List of Substances of Very High Concern for authorisation", or they do not exceed the threshold with the European Chemicals Agency.

REFERENCES

• CML - Department of Industrial Ecology, CML-IA Characterisation Factors, Dated August 2016, Leiden University, Leiden, Netherlands Available at:

https://www.universiteitleiden.nl/en/research/research-output/science/cml-ia-characterisa.pn-factors • Simapro 9.1.1.1

• EN 15804: Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products', I.S. EN 15804:2012+11:2013 and En 15804+A2:2019.

• ISO 14040: Environmental management - Life cycle assessment Principles and Framework', International Organization for Standardization, ISO14040:2006.

• ISO 14044: Environmental management - Life cycle assessment - Requirements and guidelines', International Organization for Standardization, ISO14044:2, 6.

• ISO 14025: Environmental labels and declarations -- Type III vironmental declarations -- Principles and procedures', International Organization for Standardization, IS 2025:2006.

• NEN-EN 15804+A2 and NMD Bepalingsmethode in jeuprestation on bouwwerken 1.0

REMARKS None

