

# Environmental Product Declaration

*according to ISO 14025 and EN 15804*



This declaration is for:  
**eyrise® s350 TGU**

Provided by:  
**eyrise B.V.**



program operator  
**Stichting MRPI®**  
publisher  
**Stichting MRPI®**  
**[www.mrpi.nl](http://www.mrpi.nl)**

MRPI® registration  
**1.1.00333.2022**  
date of first issue  
**05-08-2022**  
date of this issue  
**05-08-2022**  
expiry date  
**05-08-2027**





## COMPANY INFORMATION



eyrise B.V.  
De Run 5432  
5504 DE  
Veldhoven

eyrisesupport@merckgroup.com  
<https://www.eyrise.com/>

## MRPI® REGISTRATION

1.1.00333.2022

## DATE OF ISSUE

05-08-2022

## EXPIRY DATE

05-08-2027

## SCOPE OF DECLARATION

This MRPI®-EPD certificate is verified by **Anne Kees Jeeninga, Advieslab vof**.

The LCA study has been done by **Elsemieke Juffer, NIBE BV**.

The certificate is based on an LCA-dossier according to ISO14025 and EN15804+A2. It is verified according to the 'MRPI®-EPD verification protocol November 2020.v4.0'. EPDs of construction products may not be comparable if they do not comply with EN15804+A2. Declaration of SVHC that are listed on the 'Candidate List of Substances of Very High Concern for authorisation' when content exceeds the limits for registration with ECHA.

## PROGRAM OPERATOR

Stichting MRPI®  
Kingsfordweg 151  
1043GR  
Amsterdam

ir. J-P den Hollander, Managing director MRPI®

## PRODUCT

eyrise® s350 TGU

## DECLARED UNIT/FUNCTIONAL UNIT

A glass build-up of 1230x1480 mm, calculated back to 1m², for a tripple glas unit, with a Ug-value of 0.5 W/m²K and a lifetime of 30 years.

## DESCRIPTION OF PRODUCT

eyrise® s350 is a triple glass build-up consisting of Liquid Crystals (LC) molecules embedded between two glass sheets.

## VISUAL PRODUCT



## MORE INFORMATION

<https://www.eyrise.com/>

## DEMONSTRATION OF VERIFICATION

CEN standard EN15804 serves as the core PCR[a]

Independent verification of the declaration and data,

according to EN ISO 14025:2010:

internal: external: X

Third party verifier:

Anne Kees Jeeninga, Advieslab vof

[a] PCR = Product Category Rules

## DETAILED PRODUCT DESCRIPTION

eyrise® s350 instant solar glass is a laminated Insulating Glass Unit (IGU), which consists of Liquid Crystals (LC) molecules embedded between two glass sheets having a coating of transparent conductive oxide.

A typical triple-glazed unit consists of a laminated inner pane, a middle pane, and a laminated outer pane separated each of them by a cavity (2 cavities in total). The outer pane is a laminate of heat-strengthened cover glass and two identical eyrise® cells. The eyrise® cells constitute the core of the dynamic tinting in an eyrise® IGU, each eyrise cell has a thickness of 8mm. A low voltage changes the orientation of liquid crystal molecules and hence it's light and heat transmittance. This change in orientation determines the tint of solar glass.

The weight per square meter, with the TGU buildup, is approximately 111 kg/m². Reference service life is based on the EN-17074 and on information from the manufacturer (Durability\_EPDP). The PCR is followed and 30 years is adhered to.

The total weight for a window with a size of 1,23m x 1,48m is 194 kg (this includes the weight of the glass and PVB only).

The power consumption for the cells is @ 1 W/m². The eyrise® IGU is driven by an eyrise® driver through a driver cable – pigtail connection. The computer modules that are needed as the control panels for the sun protection function have a lifetime expectancy of 10 years and a warranty of 5 years.

Specifications on the build-up are confidential and will not be disclosed.

COMPONENT >1% of total mass	[kg / %]
Glass	90-95%
PVB layer	4%
Others (technical modules, copper)	2-5%

(\*) > 1% of total mass

## SCOPE AND TYPE


The product specific EPD for eyrise s350 TGU is a Cradle-to-Gate with options EPD. The product is produced in the Netherlands and partly in Germany. The software is Simapro 9.1 and NIBE's R<THiNK application are used to perform the LCA. The Ecoinvent 3.6 database was used. The validity of this EPD is in correspondence with the specifications of the LCA project report. The target groups of this LCA study are users of EPD's (business to business) in accordance with the EN 15804:2019 +A2. The LCA is intended for publication at MRPI and EcoPlatform.

The input data are representative for eyrise s350 TGU, a product of eyrise B.V. The data are representative for production in the Netherlands for the European market.

PRODUCT STAGE			CONSTRUCTION			USE STAGE							END OF LIFE				BENEFITS AND	
			PROCESS										STAGE				LOADS BEYOND THE	
			STAGE														SYSTEM BOUNDARIES	
Raw material supply	Transport	Manufacturing	Transport gate to site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	ND	ND	x	ND	ND	ND	ND	x	x	x	x	x		

X = Modules Assessed

ND = Not Declared

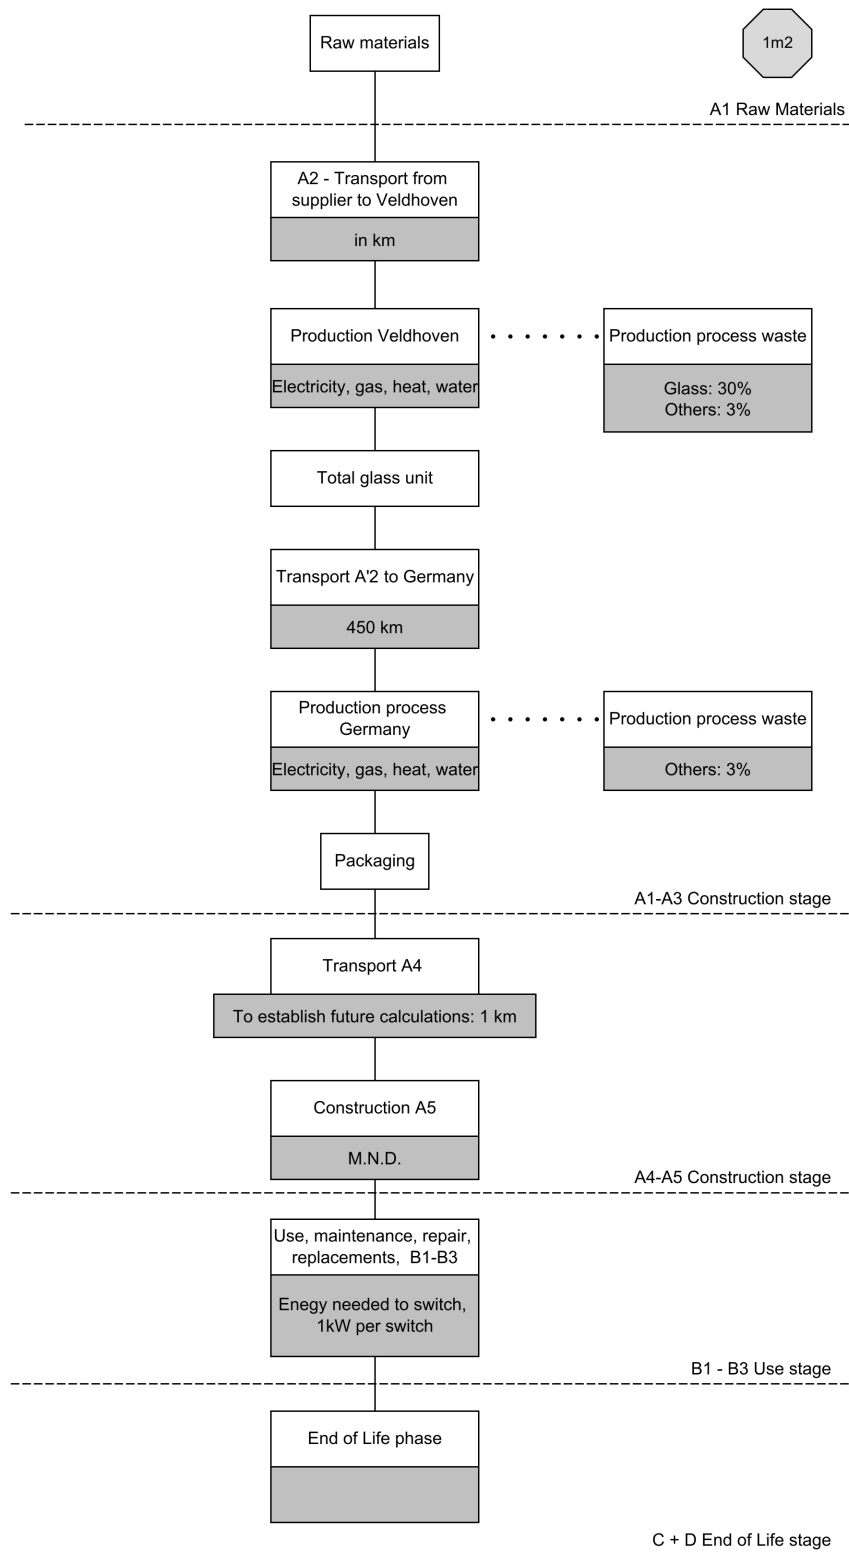

LCA process diagram according to EN 15804 (7.2.1)

## REPRESENTATIVENESS

### Data collection period

All data (materials, production amount and total energy) is collected in 2021-2022 and relate to the year 2020. The amounts of electricity and gas use for production are based on consumption data in the year 2020.

## ENVIRONMENTAL IMPACT per functional unit or declared unit (core indicators A2)

	UNIT	A1	A2	A3	A1-A3	A4	A5	B3	C1	C2	C3	C4	D
GWP-total	kg CO2 eq.	1.42 E+2	1.37 E+1	7.68 E+1	2.33 E+2	1.48 E-2	8.87 E-1	2.58 E+1	0.00	1.02 E+0	1.31 E+1	1.75 E-1	-3.37 E+1
GWP-fossil	kg CO2 eq.	1.42 E+2	1.37 E+1	7.45 E+1	2.30 E+2	1.48 E-2	8.87 E-1	2.60 E+1	0.00	1.02 E+0	1.25 E+1	1.75 E-1	-3.33 E+1
GWP-biogenic	kg CO2 eq.	6.01 E-1	9.69 E-4	2.18 E+0	2.78 E+0	6.85 E-6	1.41 E-4	-1.78 E-1	0.00	4.69 E-4	5.89 E-1	5.09 E-4	-3.44 E-1
GWP-luluc	kg CO2 eq.	8.35 E-2	7.28 E-3	8.87 E-2	1.79 E-1	5.44 E-6	7.31 E-5	4.19 E-2	0.00	3.72 E-4	3.92 E-3	2.90 E-5	-1.80 E-2
ODP	kg CFC11 eq.	1.96 E-5	2.88 E-6	6.72 E-6	2.92 E-5	3.27 E-9	2.84 E-8	2.19 E-6	0.00	2.24 E-7	1.42 E-6	6.61 E-8	-1.72 E-6
AP	mol H+ eq.	1.46 E+0	2.66 E-1	4.33 E-1	2.16 E+0	8.60 E-5	4.36 E-4	2.05 E-1	0.00	5.90 E-3	1.87 E-2	1.34 E-3	-1.58 E-1
EP-freshwater	kg PO4 eq.	7.07 E-3	9.61 E-5	5.16 E-3	1.23 E-2	1.50 E-7	2.69 E-6	4.74 E-3	0.00	1.03 E-5	1.49 E-4	1.10 E-6	-1.89 E-4
EP-marine	kg N eq.	2.20 E-1	6.95 E-2	7.58 E-2	3.65 E-1	3.03 E-5	1.24 E-4	3.18 E-2	0.00	2.08 E-3	4.47 E-3	5.11 E-4	-2.01 E-2
EP-terrestrial	mol N eq.	2.71 E+0	7.72 E-1	9.12 E-1	4.39 E+0	3.34 E-4	1.37 E-3	3.79 E-1	0.00	2.29 E-2	4.76 E-2	5.52 E-3	-3.76 E-1
POCP	kg NMVOC eq.	6.75 E-1	2.04 E-1	3.20 E-1	1.20 E+0	9.54 E-5	3.70 E-4	1.05 E-1	0.00	6.54 E-3	1.30 E-2	1.59 E-3	-6.13 E-2
ADP-minerals & metals	kg Sb eq.	2.44 E-2	2.21 E-4	1.03 E-3	2.57 E-2	3.76 E-7	1.29 E-6	1.33 E-2	0.00	2.58 E-5	8.28 E-5	1.23 E-6	8.06 E-4
ADP-fossil	MJ, net calorific value	1.77 E+3	1.90 E+2	1.03 E+3	2.99 E+3	2.24 E-1	7.87 E-1	3.17 E+2	0.00	1.53 E+1	3.94 E+1	4.40 E+0	-3.01 E+2
WDP	m3 world eq. deprived	5.24 E+1	4.91 E-1	8.59 E+0	6.15 E+1	8.00 E-4	4.52 E-2	6.40 E+0	0.00	5.49 E-2	2.52 E+0	1.81 E-2	-1.23 E+1

GWP-total = Global Warming Potential total

GWP-fossil = Global Warming Potential fossil fuels

GWP-biogenic = Global Warming Potential biogenic

GWP-luluc = Global Warming Potential land use and land use change

ODP = Depletion potential of the stratospheric ozone layer

AP = Acidification Potential, Accumulated Exceedence

EP-freshwater = Eutrophication Potential, fraction of nutrients reaching freshwater end compartment

EP-marine = Eutrophication Potential, fraction of nutrients reaching marine end compartment

EP-terrestrial = Eutrophication Potential, Accumulated Exceedence

POCP = Formation potential of tropospheric ozone photochemical oxidants

ADP-minerals&metals = Abiotic Depletion Potential for non fossil resources [2]

ADP-fossil = Abiotic Depletion for fossil resources potential [2]

WDP = Water (user) deprivation potential, deprivation-weighted water consumption [2]

Disclaimer [2]

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

## ENVIRONMENTAL IMPACT per functional unit or declared unit (additional indicators A2)

	UNIT	A1	A2	A3	A1-A3	A4	A5	B3	C1	C2	C3	C4	D
PM	Disease incidence	1.30 E-5	8.16 E-7	2.94 E-6	1.68 E-5	1.33 E-9	3.84 E-9	1.32 E-6	0.00	9.15 E-8	1.75 E-7	2.85 E-8	-1.47 E-6
IRP	kBq U235 eq.	4.96 E+0	8.06 E-1	2.27 E+0	8.03 E+0	9.37 E-4	3.25 E-3	1.19 E+0	0.00	6.42 E-2	1.77 E-1	1.91 E-2	-5.71 E-1
ETP-fw	CTUe	5.92 E+3	1.47 E+2	1.22 E+3	7.29 E+3	1.99 E-1	1.11 E+1	2.38 E+3	0.00	1.37 E+1	8.06 E+2	1.36 E+1	-1.17 E+3
HTP-c	CTUh	8.29 E-8	6.87 E-9	4.64 E-8	1.36 E-7	6.47 E-12	1.69 E-10	3.09 E-8	0.00	4.43 E-10	8.48 E-9	5.40 E-11	-1.65 E-8
HTP-nc	CTUh	3.24 E-6	1.44 E-7	1.10 E-6	4.48 E-6	2.18 E-10	3.57 E-9	1.39 E-6	0.00	1.50 E-8	1.62 E-7	1.67 E-9	-8.64 E-7
SQP	---	6.60 E+2	9.95 E+1	2.62 E+2	1.02 E+3	1.94 E-1	3.57 E-1	1.53 E+2	0.00	1.33 E+1	1.83 E+1	9.72 E+0	-2.32 E+2

PM = Potential incidence of disease due to PM emissions

IRP = Potential Human exposure efficiency relative to U235 [1]

ETP-fw = Potential Comparative Toxic Unit for ecosystems [2]

HTP-c = Potential Comparative Toxic Unit for humans [2]

HTP-nc = Potential Comparative Toxic Unit for humans, non-cancer [2]

SQP = Potential soil quality index [2]

### Disclaimer [1]

- This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

### Disclaimer [2]

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.



### RESOURCE USE per functional unit or declared unit (A1 / A2)

	UNIT	A1	A2	A3	A1-A3	A4	A5	B3	C1	C2	C3	C4	D
PERE	MJ	1.15 E+2	1.86 E+0	1.02 E+3	1.13 E+3	2.80 E-3	1.02 E-2	3.52 E+1	0.00	1.92 E-1	4.31 E-1	1.03 E+0	-1.00 E+1
PERM	MJ	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PERT	MJ	1.15 E+2	1.86 E+0	1.01 E+3	1.13 E+3	2.80 E-3	6.99 E-2	3.53 E+1	0.00	1.92 E-1	3.94 E+0	6.89 E-2	-2.57 E+1
PENRE	MJ	1.89 E+3	2.02 E+2	1.13 E+3	3.22 E+3	2.38 E-1	2.46 E-1	3.37 E+2	0.00	1.63 E+1	9.37 E+0	1.86 E+1	-1.67 E+2
PENRM	MJ	2.44 E+1	0.00	1.69 E+1	4.13 E+1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-4.52 E+0
PENRT	MJ	1.91 E+3	2.02 E+2	1.11 E+3	3.23 E+3	2.38 E-1	8.36 E-1	3.38 E+2	0.00	1.63 E+1	4.18 E+1	4.68 E+0	-3.25 E+2
SM	MJ	4.56 E-1	0.00	1.17 E-2	4.68 E-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
RSF	MJ	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
NRSF	MJ	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
FW	m3	1.30 E+0	1.69 E-2	3.89 E-1	1.71 E+0	2.72 E-5	1.33 E-3	2.40 E-1	0.00	1.87 E-3	6.97 E-2	5.23 E-3	-3.14 E-1

PERE = Use of renewable energy excluding renewable primary energy resources

PERM = Use of renewable energy resources used as raw materials

PERT = Total use of renewable primary energy resources

PENRE = Use of non-renewable primary energy resources excluding non-renewable energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total use of non-renewable primary energy resources

SM = Use of secondary materials

RSF = Use of renewable secondary fuels

NRSF = Use of non renewable secondary fuels

FW = Use of net fresh water

### OUTPUT FLOWS AND WASTE CATEGORIES per functional unit or declared unit (A1 / A2)

	UNIT	A1	A2	A3	A1-A3	A4	A5	B3	C1	C2	C3	C4	D
HWD	kg	6.45 E-3	3.37 E-4	4.41 E-3	1.12 E-2	5.67 E-7	1.57 E-6	1.83 E-3	0.00	3.89 E-5	3.30 E-3	4.95 E-6	4.09 E-3
NHWD	kg	1.28 E+1	6.60 E+0	1.68 E+1	3.61 E+1	1.42 E-2	6.15 E-2	3.62 E+0	0.00	9.73 E-1	2.94 E+0	3.14 E+1	-3.80 E+0
RWD	kg	5.68 E-3	1.28 E-3	2.95 E-3	9.91 E-3	1.47 E-6	3.17 E-6	9.16 E-4	0.00	1.01 E-4	1.66 E-4	2.99 E-5	-5.69 E-4
CRU	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
MFR	kg	0.00	0.00	1.35 E+1	1.35 E+1	0.00	1.92 E-2	3.25 E-2	0.00	0.00	7.33 E+1	0.00	0.00
MER	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
EEE	MJ	0.00	0.00	1.53 E-1	1.53 E-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.05 E+1
ETE	MJ	0.00	0.00	2.64 E-1	2.64 E-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.52 E+1

HWD = Hazardous Waste Disposed

RWD = Radioactive Waste Disposed

MFR = Materials for recycling

EEE = Exported Electrical Energy

NHWD = Non Hazardous Waste Disposed

CRU = Components for reuse

MER = Materials for energy recovery

ETE = Exported Thermal Energy



## BIOGENIC CARBON CONTENT per functional unit or declared unit (A1 / A2)

	UNIT	A1	A2	A3	A1-A3	A4	A5	B3	C1	C2	C3	C4	D
BCCpr	kg C	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
BCCpa	kg C	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

BCCpr = Biogenic carbon content in product

BCCpa = Biogenic carbon content in packaging

## CALCULATION RULES

### Cut-off criteria

There is no cut-off of inputs and outputs in any of the processes during the life cycle stage, unit processes of each declared life cycle stage are considered.

### Allocation

The energy use per kilogram product is determined by allocating the total energy use of 2020 to the total amount of produced products in kilogram.

In this LCA study the following is included:

#### Product stage(A1-A3)

The production stage consists of the extraction of raw materials, transportation of the raw materials, processing the raw materials into materials and the production of the product. The required energy for production, external treatments, ancillary materials, packaging material and production emissions are included.

#### Construction process stage (A4-A5)

The construction stage (A5) is not considered, transport to the construction site (A4) is considered. The computer modules, which are officially transported from Veldhoven to the construction site directly, are added in the A4 transportation because of the small weight this has little impact on the total of the environmental emissions. Transportation in A4 is modelled for 1 km, the results can be multiplied by the distance that is required for the specific project. Hence, the users can determine for their respective project what the value must be, and find their sources accordingly.

#### Use stage (B1-B7)

The use stage (B1 to B7) is not considered.

#### End of life stage (C1-C4)

When the end of the life stage of the building is reached, the de-construction/demolition begins. This EPD considers de-construction/demolition (C1), the necessary transport (C2) from the demolition site to the sorting location and distance to final disposal. The end of life stage includes the final disposal to landfill (C4), incineration (C3) and needed recycling processes up to the end-of-waste point (C3). Loads and benefits of recycling, re-use and exported energy are part of module D. The default end-of-life scenarios of the annex (november 2020) to the NMD Determination method v1.0 have been used for the various materials in the product.

#### Benefits and Loads beyond the system boundary (D)

This stage contains the potential loads and benefits of recycling and re-use of raw

materials/products. The loads contain the needed recycling processes from end-of-waste-point up to the point-of-equivalence of the substituted primary raw material and a load for secondary material that will be lost at the end-of-life stage. The loads and benefits of recycling and reuse are included in this module. The benefits are calculated based on the primary content and the primary equivalent. In addition, the benefits of energy recovery are granted at this stage. The amount of avoided energy is based on the Lower Heating Values of the materials and the efficiencies of the incinerators as mentioned in the NMD Determination method v1.0 or Ecolnvent 3.6 (2019).

#### *Data quality*

The data quality is described below by theme:

#### *Geographical coverage*

The input data is representative for s350 TGU of eyrise B.V. The data are representative for production in the Netherlands, and partly Germany, for the European market.

#### *Time period covered*

Production data concerning the material composition are collected in the period 2021-2022 and relate to the year 2020. The amounts of electricity and gas use for production are based on consumption data in the year 2020.

#### *Technology coverage*

The (current) technology for the production of raw materials in the year 2020 is used.

Attention was paid to the accuracy, completeness, representativeness, consistency and reproducibility of the data, as follows:

#### *Precision*

Production Data are collected from financial statements, bill of materials, calculations, measurements and estimates. The collected data has sufficient accuracy for true outcomes.

#### *Completeness*

The aim was to obtain complete data of materials, transportation, energy, emissions and waste. All relevant environmental interventions are included in the inventory.

#### *Representativeness*

The representativeness of the data is good, because they are based on the processes that occur mainly in one factory. The origin of the materials is properly inventoried. The input data are representative for the actually produced glass-unit.

#### *Consistency*

The consistency is guaranteed by only using one database, Ecolnvent 3.6.

#### *Reproducibility*

The values on which this LCA is performed, can be found in this report and the corresponding project file. The way on which the data are collected and where the information is based on, is included. As a result, the performed LCA is reproducible.

## SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION

### End-of-life stage (C2-C4)

At the end-of-life stage scenarios are used for waste processing. The scenarios on which the LCA is based are outlined in more detail below.

Name: glass	Value	Unit
Transport distance for recycling (module C2)	50	km
Transport distance for landfill (module C2)	100	km
Recycling	70	%
Landfill	30	%

Name: Technical modules (polyolefines (i.a. pe,pp))	Value	Unit
Transport distance for recycling (module C2)	50	km
Transport distance for landfill (module C2)	100	km
Transport distance for incineration (module C2)	150	km
Recycling	5	%
Landfill	10	%
Incineration	85	%

Name: PVB layer	Value	Unit
Transport distance for recycling (module C2)	50	km
Transport distance for landfill (module C2)	100	km
Transport distance for incineration (module C2)	150	km
Landfill	10	%
Incineration	85	%

Name: Copper, mixed (electricity cables)	Value	Unit
Transport distance for recycling (module C2)	50	km
Transport distance for landfill (module C2)	100	km
Transport distance for incineration (module C2)	150	km
Recycling	85	%
Landfill	10	%
Incineration	5	%

## DECLARATION OF SVHC

The product does not contain SVHC.

## REFERENCES

### *ISO 14040*

ISO 14040:2006-10, Environmental management - Life cycle assessment - Principles and framework; EN ISO 14040:2006

### *ISO 14044*

ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines; EN ISO 14040:2006

### *ISO 14025*

ISO 14025:2011-10: Environmental labels and declarations – Type III environmental declarations – Principles and procedures

### *EN 15804+A1*

EN 15804+A1: 2013: Sustainability of construction works – Environmental Product Declarations – Core rules for the product category of construction products

### *EN 15804+A2*

EN 15804+A2: 2019: Sustainability of construction works – Environmental Product Declarations – Core rules for the product category of construction products

### *EN 17074*

EN 17074:2019: Glass in building – Environmental product declaration – Product category rules for flat glass products

### *EN 17213*

EN 17213:2020: Windows and doors – Environmental Product Declarations – Product category rules for windows and pedestrian doorsets

### *SBK-verification protocol*

SBK-verification protocol – inclusion data in the Dutch environmental database, Final Version 3.0, January 2019, SBK

### *NMD Determination method*

NMD Determination method Environmental performance Construction works v1.0 July 2020, foundation NMD

## REMARKS

Framing, fastening materials, adjusting frame, hinges and locks, silencing box, doorstep or water barrier are not included in this LCA, it is purely the glass.