



# PERMASTEELISA

**Environmental  
Product  
Declaration**

According to EN15804+A2

This declaration is for:  
**Curtain wall EWS03 of "33 Charter House" London**

Provided by:  
**Permasteelisa S.p.A. - Permasteelisa Group**



MRPI® registration  
**1.1.00791.2025**

program operator  
**Stichting MRPI®**  
publisher  
**Stichting MRPI®**  
**www.mrpi.nl**

date of first issue  
**7-4-2025**  
date of this issue  
**7-4-2025**  
expiry date  
**7-4-2030**





# PERMASTEELISA

## COMPANY INFORMATION

Permasteelisa S.p.A. - Permasteelisa Group  
 Viale E. Mattei 21/23  
 31029 TV  
 Vittorio Veneto  
 Italy  
 +39 0438 504635  
 info@permasteelisagroup.com  
<https://permasteelisa.permasteelisagroup.com/>

## MRPI® REGISTRATION

1.1.00791.2025

## DATE OF THIS ISSUE

7-4-2025

## EXPIRY DATE

7-4-2030

## SCOPE OF DECLARATION

This MRPI®-EPD certificate is verified by U. Hofstra, SGS INTRON b.v.. The LCA study has been done by L. Ceyhan-van Munster, Nibe b.v.. The certificate is based on an LCA-dossier according to EN15804+A2. It is verified according to the 'MRPI®-EPD verification protocol November 2020.v4.0'. EPDs of construction products may not be comparable if they do not comply with EN15804+A2. Declaration of SVHC that are listed on the 'Candidate list of Substances of Very High Concern for authorisation' when content exceeds the limits for registration with ECHA.

## PROGRAM OPERATOR

Stichting MRPI®  
 Kingsfordweg 151  
 1043 GR  
 Amsterdam

## PRODUCT

Curtain wall EWS03 of "33 Charter House" London


## DECLARED UNIT / FUNCTIONAL UNIT

1 m2

## DESCRIPTION OF PRODUCT



A typical curtain wall element EWS03 of the project "33 Charter House", London, including fixings and closures. Size: 3,0 x 3,65 = 10,95 m2. The results are expressed per m2 of façade area by applying the conversion factor 1 / 10,95

## VISUAL PRODUCT

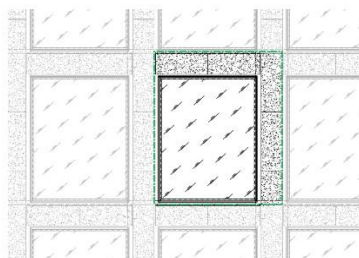

## MORE INFORMATION

<https://scheldebouw.permasteelisagroup.com>

<p>Ing. L. L. Oosterveen MSc. MBA          Managing Director MRPI</p>	<p>DEMONSTRATION OF VERIFICATION          CEN standard EN15804 serves as the core PCR [1]</p>
	<p>Independent verification of the declaration and data according to EN15804+A2</p> <p>internal: external: X</p>
	<p>Third party verifier: U. Hofstra, SGS INTRON b.v.</p>  <p>[1] PCR = Product Category Rules</p>





# PERMASTEELISA

## DETAILED PRODUCT DESCRIPTION (PART 1)

One typical curtain wall element EWS03 of the project 33 Charter House, London, including fixings and closures.

Size: 3,0 x 3,65 = 10,95 m<sup>2</sup>.

Weight: 113,65 kg / m<sup>2</sup>.

Performance in accordance with DoP and CE-marking nr. 024-CPR-2021.

Consisting of the following parts:


Glazing: GD03, DGU 6.6.4-16-5.5.4

Spandrel: blind panel composed by 3 mm th. aluminum sheet, air cavity, 120mm


th. insulation, 12.5 mm th. fiberboard panel, 3 mm th. aluminum sheet

Aluminium profiles: 285 mm deep at vision section, 142 mm deep at spandrel with external features section


Firestop at floor edge: 50 x 120 mm Lamatherm (stone wool) with 1 mm steel sheet on top

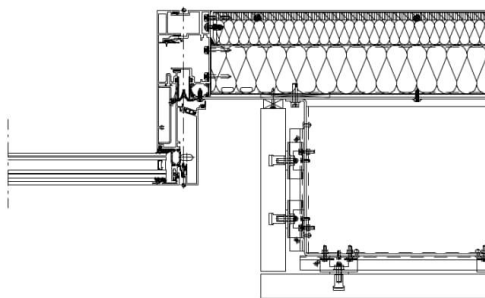

EWS03 - Typical horizontal section at vision (left&right)

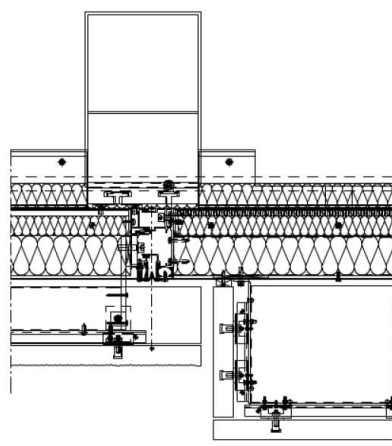

EWS03 - Typical horizontal section at spandrel (left&right)

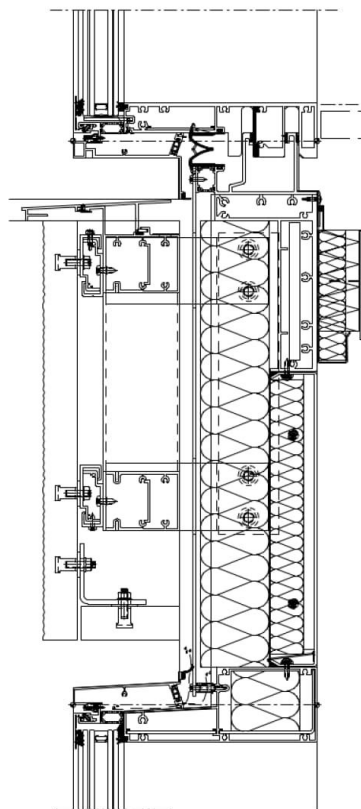

EWS03 - Typical vertical section at stack joint





## DETAILED PRODUCT DESCRIPTION (PART 2)

### RSL Product

The curtain wall facade has a reference service life of 60 years.

### RSL parts

The facade consists of various parts with different service lifetimes. During the reference service life (RSL) of the facade (60 years), several parts like glazing, sealants and gaskets need to be replaced. The replacement of these parts has been accounted for in life cycle stage B3.

The reference service life of the product parts in this report is based on the estimated service life, as defined in BS ISO 15686-1, which Scheldebouw provides to the client in their general guarantees and warranties schedule. For materials with varying service life categories the shortest period is taken as a conservative approach.

\*The RSL of 25 years for the glazing and the sealant has been artificially modelled as 20 years to end up with a discrete number of replacement cycles, following the CWCT guideline.

Product part	RSL
Laminated double glazing	25 years*
EPDM gaskets	30 years
Sealant	25 years*
All other parts	60 years

Component (> 1%)	(kg / m <sup>2</sup> )
Laminated double glazing	32,2
Anodised aluminium extrusions	3,9
Powder coated aluminium extrusions	16,1
Thermal breaks	*
Anodised aluminium sheets	5,8
Mineral wool insulation	3,2
Pre-galvanised steel sheets	3,1
Chromium steel parts e.g. fasteners	3,65
EPDM gaskets	*
Sealant	*
Fiberboard	3,1
Limestone	41,7
Total	113,65
(*) <1% of the total mass, but included for completeness of the assesment	



## SCOPE AND TYPE

The input data are representative for facade type EW03 of the project 33 Charter House in London, a product produced by Permasteelisa S.p.A in Vittorio Veneto, Italy. The data are representative for building site London and production location Vittorio Veneto with suppliers located in Europe. In absence of predefined waste / end-of-life scenarios for the United Kingdom, the Dutch scenarios are used, because they are deemed representative.

LCA method R<THINK: EN15804+A2:2019

LCA software\*\*: Simapro 9.1.1

Characterisation method: EN 15804 +A2 Method v1.0

LCA database profiles: EcoInvent version 3.6


Version database: v3.17 (2024-05-22)

(\*\*) Used for calculating the characterised results of the environmental profiles within R<THINK.

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USER STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport gate to site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse - Recovery - Recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
x	x	x	x	x	x	x	x	ND	ND	ND	ND	x	x	x	x	x

X = Modules Assessed

ND = Not Declared

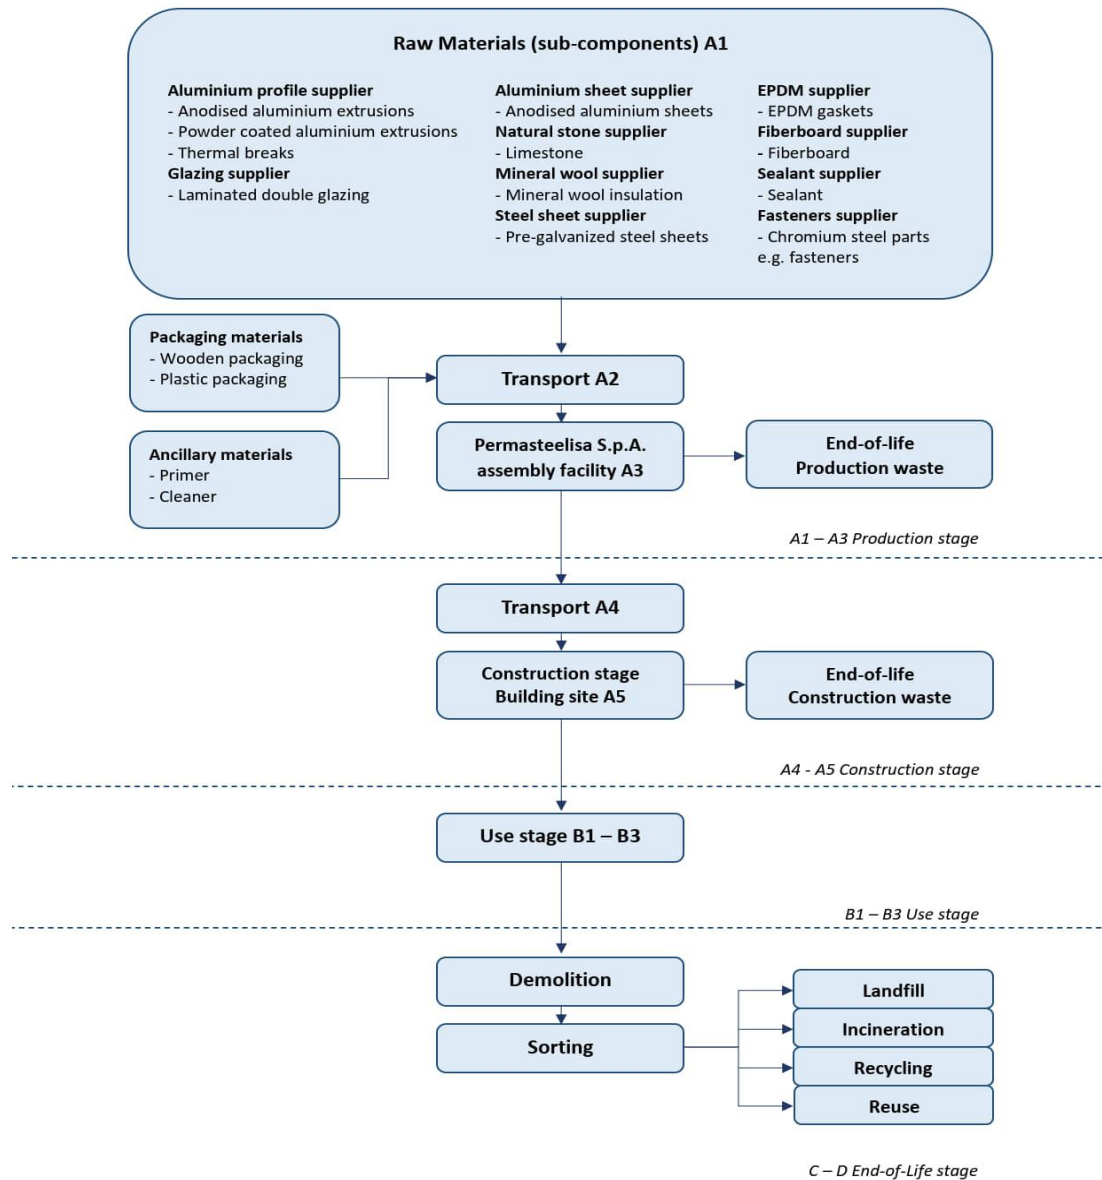

## REPRESENTATIVENESS

The input data are representative for facade type EW03 of the project 33 Charter House in London, a product produced by Permasteelisa S.p.A in Vittorio Veneto, Italy. The data are representative for building site London and production location Vittorio Veneto with suppliers located in Europe.





## ENVIRONMENTAL IMPACT per functional unit or declared unit (core indicators A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-total	kg CO2 eq	3,52E+02	8,04E+00	2,22E+01	3,82E+02	1,98E+01	3,68E+01	0,00E+00	8,38E+00	1,57E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,09E+00	9,04E-01	1,02E+01	1,17E-01	-1,86E+02
GWP-fossil	kg CO2 eq	3,48E+02	8,03E+00	2,80E+01	3,84E+02	1,98E+01	3,04E+01	0,00E+00	9,41E+00	1,56E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,09E+00	9,04E-01	9,90E+00	1,16E-01	-1,83E+02
GWP-biogenic	kg CO2 eq	1,14E+00	3,71E-03	-5,98E+00	-4,84E+00	8,91E-03	6,26E+00	0,00E+00	8,16E-03	9,61E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,83E-04	4,17E-04	2,98E-01	6,55E-04	-3,92E-01
GWP-luluc	kg CO2 eq	3,30E+00	2,94E-03	1,02E-01	3,40E+00	7,34E-03	1,35E-01	0,00E+00	1,69E+00	1,34E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,42E-03	3,31E-04	3,81E-03	4,66E-05	-2,91E+00
ODP	kg CFC11 eq	3,31E-05	1,77E-06	3,61E-06	3,85E-05	4,35E-06	3,10E-06	0,00E+00	1,25E-06	2,32E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,11E-07	1,99E-07	5,46E-07	3,77E-08	-1,39E-05
AP	mol H+ eq.	2,50E+00	4,66E-02	2,22E-01	2,77E+00	1,20E-01	1,58E-01	0,00E+00	4,64E-02	1,21E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,19E-03	5,24E-03	3,30E-02	9,35E-04	-1,30E+00
EP-fresh water	kg PO4 eq.	1,61E-02	8,10E-05	9,52E-04	1,71E-02	1,98E-04	1,02E-03	0,00E+00	2,52E-04	4,76E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,04E-05	9,11E-06	2,15E-04	1,77E-06	-7,85E-03
EP-marine	kg N eq.	3,67E-01	1,64E-02	6,28E-02	4,46E-01	4,13E-02	2,78E-02	0,00E+00	2,61E-02	2,20E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,63E-04	1,85E-03	5,96E-03	3,14E-04	-1,57E-01
EP-terrestrial	mol N eq.	4,21E+00	1,81E-01	7,03E-01	5,10E+00	4,56E-01	3,22E-01	0,00E+00	1,67E-01	2,57E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,05E-03	2,04E-02	6,86E-02	3,45E-03	-1,86E+00
POCP	kg NMVOC eq.	1,27E+00	5,17E-02	1,93E-01	1,52E+00	1,30E-01	8,95E-02	0,00E+00	3,82E-02	6,82E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,30E-03	5,81E-03	1,92E-02	9,98E-04	-6,00E-01
ADP-minerals & metals	kg Sb eq.	1,84E-02	2,03E-04	1,29E-02	3,14E-02	4,97E-04	7,29E-04	0,00E+00	1,96E-04	7,31E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,96E-06	2,29E-05	1,36E-04	9,18E-07	9,76E-02
ADP-fossil	MJ, net calorific value	4,60E+03	1,21E+02	3,90E+02	5,11E+03	2,97E+02	5,80E+02	0,00E+00	1,05E+02	2,02E+03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,64E+01	1,36E+01	5,77E+01	2,73E+00	-2,21E+03
WDP	m3 world eq. Deprived	1,15E+02	4,33E-01	1,10E+01	1,26E+02	1,06E+00	4,68E+00	0,00E+00	3,63E+00	4,41E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,75E-02	4,88E-02	6,40E-01	5,65E-02	-2,95E+01

GWP-total	=	Global Warming Potential total
GWP-fossil	=	Global Warming Potential fossil fuels
GWP-biogenic	=	Global Warming Potential biogenictotal
GWP-luluc	=	Global Warming Potential land use and land use change
ODP	=	Depletion potential of the stratospheric ozone layer
AP	=	Acidification Potential, Accumulated Exceedence
EP-freshwater	=	Eutrophication Potential, fraction of nutrients reaching freshwater end compartment
EP-marine	=	Eutrophication Potential, fraction of nutrients reaching marine end compartment
EP-terrestrial	=	Eutrophication Potential, Accumulated Exceedence
POCP	=	Formation potential of tropospheric ozone photochemical oxidants
ADP-minerals & metals	=	Abiotic Depletion Potential for non-fossil resources [1]
ADP-fossil	=	Abiotic Depletion for fossil resources potential [1]
WDP	=	Water (user) deprivation potential, deprivation-weighted water consumption [1]

### Disclaimer [1]:

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.



## ENVIRONMENTAL IMPACT per functional unit or declared unit (additional indicators A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PM	Disease incidence	9,66E-05	7,22E-07	3,43E-06	1,01E-04	1,76E-06	3,36E-06	0,00E+00	6,26E-07	1,22E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,36E-08	8,13E-08	4,13E-07	1,77E-08	-1,24E-05
IRP	kBq U235 eq.	2,03E+01	5,07E-01	1,55E+00	2,23E+01	1,25E+00	7,49E+00	0,00E+00	7,80E-01	7,31E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,38E-01	5,71E-02	2,48E-01	1,12E-02	-8,80E+00
ETP-fw	CTUe	1,14E+04	1,08E+02	8,00E+02	1,23E+04	2,65E+02	6,76E+02	0,00E+00	2,30E+02	8,41E+03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,67E+01	1,22E+01	2,66E+02	4,81E+02	-3,81E+03
HTP-c	CTUh	8,77E-07	3,50E-09	3,59E-08	9,16E-07	8,66E-09	3,58E-08	0,00E+00	9,97E-09	1,10E-07	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,51E-10	3,94E-10	5,79E-09	5,81E-11	-3,88E-07
HTP-nc	CTUh	1,02E-05	1,18E-07	6,54E-07	1,10E-05	2,89E-07	5,51E-07	0,00E+00	1,86E-07	2,32E-06	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,18E-08	1,33E-08	1,90E-07	1,73E-09	-3,80E-06
SQP	-	1,12E+03	1,05E+02	8,81E+02	2,10E+03	2,56E+02	3,09E+02	0,00E+00	1,98E+02	9,20E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,52E+01	1,18E+01	5,52E+01	5,50E+00	-5,22E+02

PM	=	Potential incidence of disease due to PM emissions
IRP	=	Potential Human exposure efficiency relative to U235 [1]
ETP-fw	=	Potential Comparative Toxic Unit for ecosystems [2]
HTP-c	=	Potential Comparative Toxic Unit for humans [2]
HTP-nc	=	Potential Comparative Toxic Unit for humans, non-cancer [2]
SQP	=	Potential soil quality index [2]

### Disclaimer [1]:

- This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste.

### Disclaimer [2]:

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.





## OUTPUT FLOWS AND WASTE CATEGORIES per functional unit or declared unit (A1 en A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HWD	kg	9,33E-02	3,07E-04	5,37E-02	1,47E-01	7,49E-04	8,83E-03	0,00E+00	2,16E-04	7,61E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,95E-05	3,45E-05	1,60E-01	3,33E-06	2,02E-01
NHWD	kg	9,13E+01	7,68E+00	5,61E+00	1,05E+02	1,87E+01	6,06E+00	0,00E+00	4,44E+00	6,16E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,06E-02	8,64E-01	2,86E+00	1,68E+01	-4,65E+01
RWD	kg	1,88E-02	7,95E-04	1,73E-03	2,13E-02	1,95E-03	4,08E-03	0,00E+00	6,92E-04	8,36E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,17E-04	8,95E-05	2,76E-04	1,71E-05	-8,33E-03
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	kg	0,00E+00	0,00E+00	5,17E+00	5,17E+00	0,00E+00	3,21E+00	0,00E+00	0,00E+00	4,79E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,51E+01	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	kg	0,00E+00	0,00E+00	-1,11E+00	-1,11E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-2,08E+01
ETE	kg	0,00E+00	0,00E+00	-1,92E+00	-1,92E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-3,59E+01

HWD = Hazardous Waste Disposed  
 NHWD = Non Hazardous Waste Disposed  
 RWD = Radioactive Waste Disposed  
 CRU = Components for reuse  
 MFR = Materials for recycling  
 MER = Materials for energy recovery  
 EEE = Exported Electrical Energy  
 ETE = Exported Thermal Energy



## RESOURCE USE per functional unit or declared unit (A1 and A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	1,06E+03	1,52E+00	1,06E+02	1,17E+03	3,71E+00	1,14E+02	0,00E+00	3,03E+01	1,38E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,95E+00	1,71E-01	6,15E+00	5,59E-02	-7,77E+02
PERM	MJ	0,00E+00	0,00E+00	5,18E+01	5,18E+01	0,00E+00	1,55E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	1,06E+03	1,52E+00	1,57E+02	1,22E+03	3,71E+00	1,16E+02	0,00E+00	3,03E+01	1,38E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,95E+00	1,71E-01	6,15E+00	5,59E-02	-7,77E+02
PENRE	MJ	4,87E+03	1,29E+02	4,01E+02	5,40E+03	3,16E+02	6,12E+02	0,00E+00	1,14E+02	2,12E+03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,79E+01	1,45E+01	6,16E+01	2,90E+00	-2,35E+03
PENRM	MJ	2,48E+01	0,00E+00	1,62E+01	4,11E+01	0,00E+00	1,24E+00	0,00E+00	0,00E+00	4,13E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-1,92E+00
PENRT	MJ	4,90E+03	1,29E+02	4,17E+02	5,44E+03	3,16E+02	6,13E+02	0,00E+00	1,14E+02	2,16E+03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,79E+01	1,45E+01	6,16E+01	2,90E+00	-2,35E+03
SM	kg	8,65E+00	0,00E+00	9,89E-01	9,63E+00	0,00E+00	2,89E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NSRF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m3	7,02E+00	1,48E-02	3,83E-01	7,42E+00	3,61E-02	3,19E-01	0,00E+00	1,68E-01	1,30E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,16E-03	1,66E-03	3,41E-02	2,95E-03	-3,83E+00

PERE	=	Use of renewable energy excluding renewable primary energy resources
PERM	=	Use of renewable energy resources used as raw materials
PERT	=	Total use of renewable primary energy resources
PENRE	=	Use of non-renewable primary energy resources excluding non-renewable energy resources used as raw materials
PENRM	=	Use of non-renewable primary energy resources used as raw materials
PENRT	=	Total use of non-renewable primary energy resources
SM	=	Use of secondary materials
RSF	=	Use of renewable secondary fuels
NSRF	=	Use of non-renewable secondary fuels
FW	=	Use of net fresh water

## BIOGENIC CARBON CONTENT per functional unit or declared unit (A1 and A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
BBCpr	kg C	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
BCCpa	kg C	0,00E+00	0,00E+00	6,17E+00	6,17E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

BCCpr	=	Biogenic carbon content in product
BCCpa	=	Biogenic carbon content in packaging



## CALCULATION RULES (PART 1)

### CUT-OFF CRITERIA

There is no cut-off applied for the inputs or outputs of any of the processes.

## CALCULATION RULES (PART 2)

### TIME PERIOD DATA COLLECTION

Background data is primarily based on Ecolnvent 3.6. Foreground data is <2 years and background data <10 years. The data quality is considered to be good.

Material quantities: design specific

Suppliers: FY2024

Factory: Calendar Year 2020-2024

Building site: following CWCT

Emissions: n/a

Fiscal Year 2024 (referred to FY2024 henceforth) refers to the financial year starting from 1st of April 2023, and ending on 31st of March 2024.

## CALCULATION RULES (PART 3)

### ALLOCATION

Allocation is applied for recycling at end-of-life of various materials according to EN 15804 rules.

## SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION (PART 1)

### Life cycle stages A1-A3 (production)

Permasteelisa S.p.A. produce the curtain wall panels in their factory in Vittorio Veneto. The various parts and materials are sourced from various suppliers as semi-finished products, enter the factory and are assembled into a facade panel. After assembly, the facade elements are packed and made ready for transport to the building site together with the brackets and other materials for fixing and/or closure.

Semi-finished products of the suppliers (cradle to supplier gate) are included in stage A1 of this LCA study. The transport movements between suppliers and Permasteelisa S.p.A. are included in stage A2 and all activities in the Permasteelisa S.p.A. assembly location in Vittorio Veneto are included in stage A3.

The production stage consists of the extraction of raw materials, transportation of the raw materials, processing the raw materials into sub-components and the assembly of the sub-components into the end-product. The required energy for production, external treatments, ancillary materials, packaging material and production emissions are included.

Supplier distances (stage A2)	km
Glazing	815
Aluminium profiles	458
Aluminium sheet work	205
Mineral wool	321
Steel sheet work	232
Fasteners	240
Gaskets	283
Sealant, incl. primer and cleaner	420
Fiberboard	283
Limestone	458
Packaging	10



## SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION (PART 2)

Life cycle stages A4-A5 (construction)

This stage consists of the transport of the product from production plant to the construction site. It also includes the loss of material during construction. The additional needed production, transport and end-of-life treatment of the lost material during construction is included. The end-of-life of packaging material up to the end-of-waste state or disposal of final residues is also included. The energy use for installation of the product is taken into account following the CWCT methodology.

The facade elements are delivered on the building site including fastening and closure materials (floor brackets and fire stop). The facade elements are lifted onto the floors of the building and installed. After that, the floor edge detail is completed by applying the mineral wool and steel sheets.

The transport movements between PermaSteelisa S.p.A. Vittorio Veneto and the building site are included in stage A4. All activities on the building site are included in stage A5.

Transport to the construction site consists of the following:

Transport conveyance	Distance	Transported mass [kg]
Lorry (truck): Vittorio Veneto-Rotterdam	1200 km	
Transoceanic ship: Rotterdam-Purfleet	282 km	
Lorry (truck): Purfleet-London	31 km	
Total:	1513 km	117,58

## SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION (PART 3)

Life cycle stages B1-B3 (use stage)

This stage consists of the impacts arising from components of the building and construction works during their use. The facade construction itself is assumed to have negligible environmental impact during its use stage B1. Cleaning of the facade needs to be done twice a year and is modelled in stage B2 following CWCT in accordance with EN 17074.

The facade consists of various parts with different service lifetimes. During the reference service life (RSL) of the facade (60 years), several parts like glazing, sealants and gaskets need to be replaced. The replacement of these parts has been accounted for in life cycle stage B3.

Product replacement (B4) and renovation (B5) are not considered. Operational water and energy use (B6-7) are not considered.

Life cycle stages C1-C4 (end of life)

When the end of the life stage of the building is reached, the de-construction/demolition begins. This EPD includes de-construction/demolition (C1), the necessary transport (C2) from the demolition site to the sorting location and distance to final disposal. The end of life stage includes the final disposal to landfill (C4), incineration (C3) and needed recycling processes up to the end-of-waste point (C3). Loads and benefits of recycling, re-use and exported energy are part of module D.

The default end-of-life scenarios of the annex (May 2024) to the NMD Determination method v1.1 have been used for the various materials in the product.

Waste scenario	Landfill [%]
Glazing	30
Aluminium	3
Thermal breaks	20
Mineral wool insulation	85
Steel sheets and brackets	5
Gaskets	10
Chromium steel	1
Sealant, primer, cleaner	0
Packaging, wood and plastic	10
Fiberboard	95
Limestone	1



Transport by "Lorry (Truck), unspecified (default)   market group for (GLO)"	Distance [km]
Landfill	100
Incineration	150
Recycling	50

## SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION (PART 5)

Life cycle stage D (benefits and loads beyond the system boundary)

This stage contains the potential loads and benefits of recycling and re-use of raw materials/products. The loads contain the needed recycling processes from end-of-waste-point up to the point-of-equivalence of the substituted primary raw material and a load for secondary material that will be lost at the end-of-life stage. The loads and benefits of recycling and reuse are included in this module. The benefits are calculated based on the primary content and the primary equivalent. In addition, the benefits of energy recovery are granted at this stage. The amount of avoided energy is based on the Lower Heating Values of the materials and the efficiencies of the incinerators as mentioned in the NMD Determination method v1.1 or EcoInvent 3.6 (2019).

## DECLARATION OF SVHC

The product does not contain any substances listed in the "Candidate List of Substances of Very High Concern (SVHC) for authorisation" exceeding 0.1% of the weight of the product.

## REFERENCES

CWCT

Centre for Window and Cladding Technology

"How to calculate the embodied carbon of facades: A methodology", Issue 1, September 2022

EN 15804+A2

EN 15804+A2: 2019: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

ISO 14040

ISO 14040:2006-10, Environmental management - Life cycle assessment - Principles and framework; EN ISO 14040:2006

ISO 14044

ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines; EN ISO 14040:2006

ISO 14025

ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

MRPI verification protocol

MRPI®-EPD verification protocol November 2020.v4.0

NMD

Nationale Milieu Database (Dutch National Environmental Database) Determination method

## REMARKS

This declaration is only valid for the specific design of this project and facade type.

