




# PERMASTEELISA

**Environmental  
Product  
Declaration**

According to EN15804+A2

This declaration is for:  
**Curtain wall FT-WP-1-06 of the project 2-4 Wilton Park,  
Dublin**

Provided by:  
**Permasteelisa S.p.A. - Permasteelisa Group**

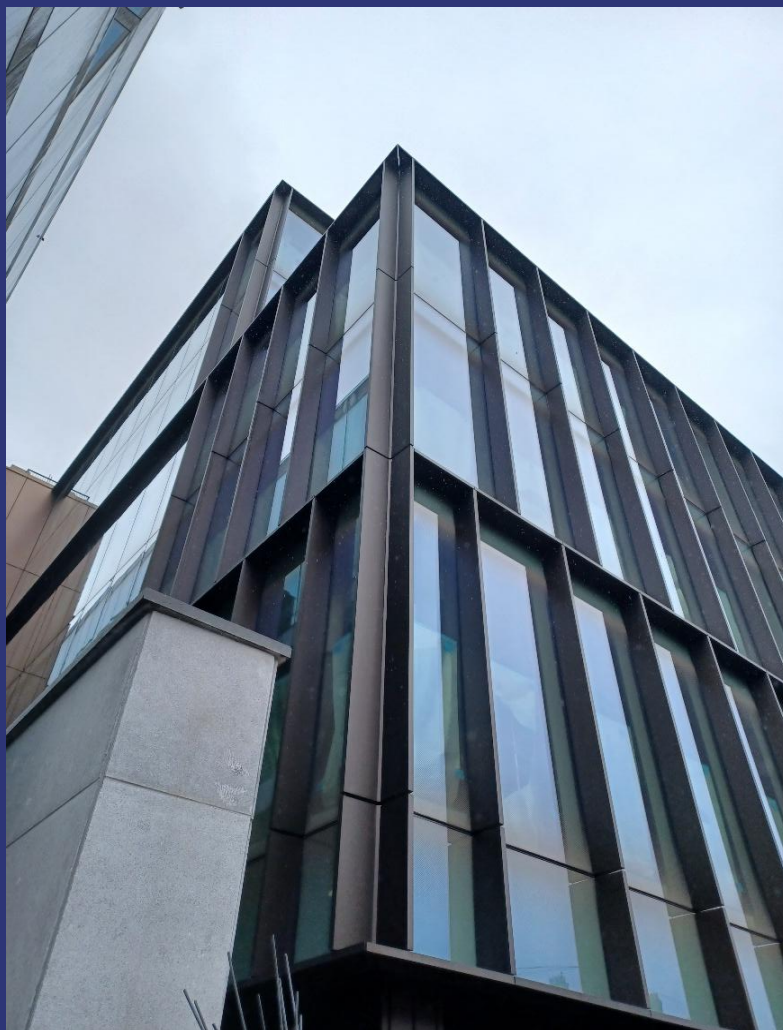

MRPI® registration:  
**1.1.00845.2025**

Program operator:  
**Stichting MRPI®**  
Publisher:  
**Stichting MRPI®**  
**www.mrpi.nl**

Date of first issue:  
**8-6-2025**  
Date of this issue:  
**8-6-2025**  
Expiry date:  
**8-6-2030**





# PERMASTEELISA

## COMPANY INFORMATION

Permasteelisa S.p.A. - Permasteelisa Group

Viale E. Mattei 21/23

31029 TV

Vittorio Veneto

Italy

+39 0438 504635

info@permasteelisagroup.com

<https://permasteelisa.permasteelisagroup.com/>

## MRPI® REGISTRATION

1.1.00845.2025

## DATE OF THIS ISSUE

8-6-2025

## EXPIRY DATE

8-6-2030

## SCOPE OF DECLARATION

This MRPI®-EPD certificate is verified by U. Hofstra, SGS INTRON b.v.. The LCA study has been done by L. Ceyhan-van Munster, Nibe b.v.. The certificate is based on an LCA-dossier according to EN15804+A2. It is verified according to the 'MRPI®-EPD verification protocol November 2020.v4.0'. EPDs of construction products may not be comparable if they do not comply with EN15804+A2. Declaration of SVHC that are listed on the 'Candidate list of Substances of Very High Concern for authorisation' when content exceeds the limits for registration with ECHA.

## PROGRAM OPERATOR

Stichting MRPI®

Kingsfordweg 151

1043 GR

Amsterdam

## PRODUCT

Curtain wall FT-WP-1-06 of the project 2-4 Wilton Park, Dublin


## DECLARED UNIT / FUNCTIONAL UNIT

1 m<sup>2</sup>

## DESCRIPTION OF PRODUCT


A typical curtain wall element FT-WP-1-06 of the project "2-4 Wilton Park", Dublin, including fixings and closures. Size: 1,50 x 3,85 = 5,775 m<sup>2</sup>. The results are expressed per m<sup>2</sup> of façade area by applying the conversion factor 1 / 5,775

## VISUAL PRODUCT

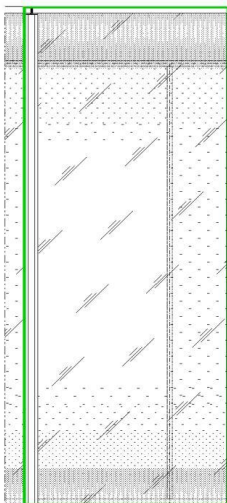

## MORE INFORMATION

<https://permasteelisagroup.com>

|  |   |
|--|---|
| <b>Ing. L. L. Oosterveen MSc. MBA</b><br><b>Managing Director MRPI</b> | <b>DEMONSTRATION OF VERIFICATION</b>  |
|  | CEN standard EN15804 serves as the core PCR [1]   |
|  | Independent verification of the declaration and data according to EN15804+A2<br>Internal: External: X                                     |
|  | Third party verifier: U. Hofstra, SGS INTRON b.v.<br> |
| [1] PCR = Product Category Rules                                       |   |





## DETAILED PRODUCT DESCRIPTION (PART 1)

One typical curtain wall facade element FT-WP-1-06 of the project 2-4 Wilton Park, Dublin, including fixings and closures. The module is composed of vision glazing with external features (vertical and horizontal fin).

Size: 1.50 x 3.85 = 5.775 m<sup>2</sup>. Results converted to 1 m<sup>2</sup> of facade area.

Weight: 88.6 kg /m<sup>2</sup>.

Consisting of the following parts:


Glazing: GD01, DGU 6.6.4-18-5.5.4

Spandrel: behind vision glazing composed by 2 mm thk. aluminum sheet, 100mm thk. insulation, 1.5/2 mm thk. galvanized sheet.


Aluminium profiles: 178 mm deep (mullions and transoms), 285 mm deep (external features).

Firestop at floor edge: 190 x 120 mm mineral wool with 1 mm steel sheet on top.

Performance in accordance with CE-marking nr. 002-CPR-2025

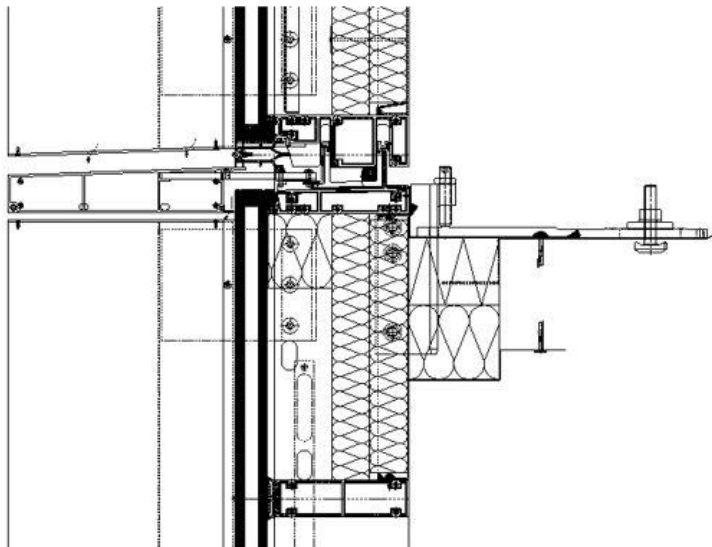

Vertical section at stack joint

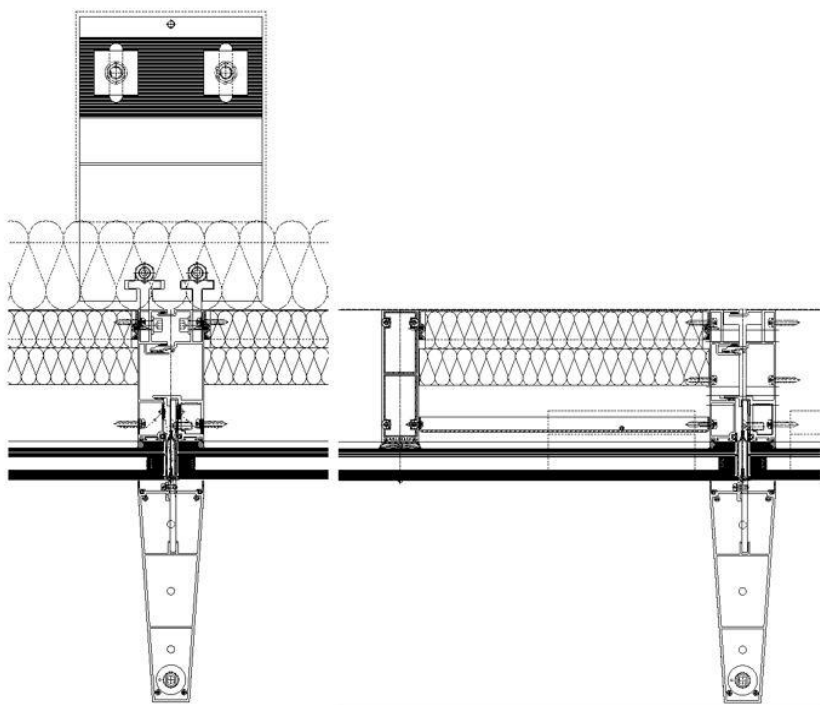

Horizontal section at spandrel

Horizontal section at vision/vertical fascia



## DETAILED PRODUCT DESCRIPTION (PART 2)

### RSL Product

The curtain wall facade has a reference service life of 60 years.

### RSL parts

The facade consists of various parts with different service lifetimes. During the reference service life (RSL) of the facade (60 years), several parts like glazing, sealants and gaskets need to be replaced. The replacement of these parts has been accounted for in life cycle stage B3.

The reference service life of the product parts in this report is based on the estimated service life, as defined in BS ISO 15686-1, which Permasteelisa S.p.A. provides to the client in their general guarantees and warranties schedule. For materials with varying service life categories the shortest period is taken as a conservative approach.

\*The RSL of 25 years for the glazing and the sealant has been artificially modelled as 20 years to end up with a discrete number of replacement cycles, following the CWCT guideline.

| Product part             | RSL       |
|--------------------------|-----------|
| Laminated double glazing | 25 years* |
| EPDM gaskets             | 30 years  |
| Sealant                  | 25 years* |
| All other parts          | 60 years  |

| Component (> 1%)  | (kg / m2) |
|---|-----------|
| Laminated double glazing  | 56,8556   |
| Anodised aluminium extrusions   | 19,14     |
| Powder coating aluminium sheets   | 0,95*     |
| Anodised aluminium sheets   | 0,135*    |
| Powder coated, pre-galvanised steel sheets                                | 4,54      |
| Pre-galvanised steel sheets   | 0,96*     |
| Mineral wool insulation   | 2,03      |
| Chromium steel parts e.g. fasteners                                       | 2,16      |
| EPDM gaskets  | 1,14      |
| Sealant   | 0,69*     |
| Total   | 88,6      |
| (*) <1% of the total mass, but included for completeness of the assesment |           |

## SCOPE AND TYPE

The input data are representative for facade type FT-WP-1-06 of the project 2-4 Wilton Park, Dublin, a product produced by Permasteelisa S.p.A. in Vittorio Veneto, Italy. The data are representative for building site Dublin and production location Vittorio Veneto with suppliers located in Europe. In absence of predefined waste / end-of-life scenarios for Ireland, the Dutch scenarios are used, because they are deemed representative.

LCA method R<THINK: EN15804+A2:2019

LCA software\*\*: Simapro 9.1.1

Characterisation method: EN 15804 +A2 Method v1.0

LCA database profiles: EcoInvent version 3.6

Version database: v3.17 (2024-05-22)

(\*\*) Used for calculating the characterised results of the environmental profiles within R<THINK.



# PERMASTEELISA

| PRODUCT STAGE       |           |               | CONSTRUCTION PROCESS STAGE |          | USE STAGE |             |        |             |               |                        |                       | END OF LIFE STAGE          |           |                  |          | BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES |
|---------------------|-----------|---------------|----------------------------|----------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|---|
| Raw material supply | Transport | Manufacturing | Transport gate to site     | Assembly | Use       | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse - Recovery - Recycling potential          |
| A1                  | A2        | A3            | A4                         | A5       | B1        | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                         | C2        | C3               | C4       | D   |
| x                   | x         | x             | x                          | x        | x         | x           | x      | ND          | ND            | ND                     | ND                    | x                          | x         | x                | x        | x   |


X = Modules Assessed

ND = Not Declared





# PERMASTEELISA

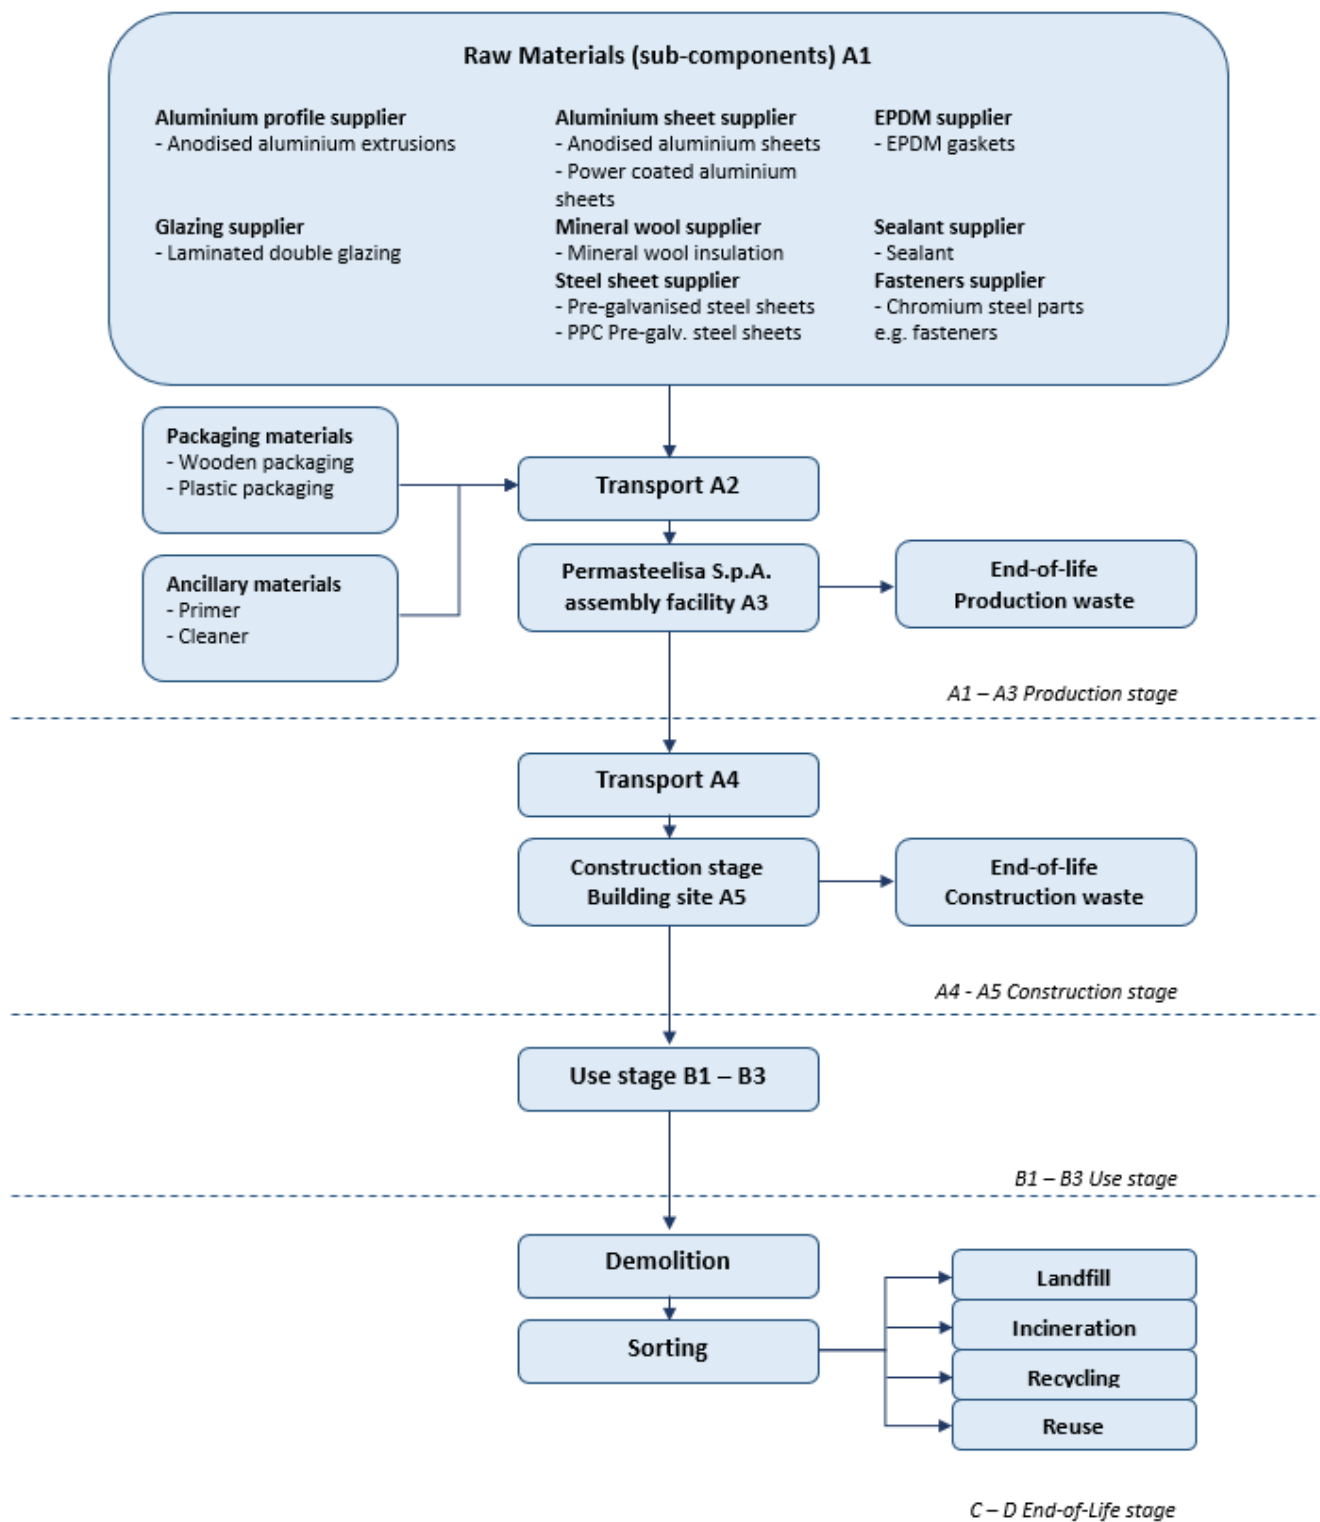

## REPRESENTATIVENESS

The input data are representative for facade type FT-WP-1-06 of the project 2-4 Wilton Park, Dublin, a product produced by Permasteelisa S.p.A in Vittorio Veneto, Italy. The data are representative for building site Dublin and production location Vittorio Veneto with suppliers located in Europe.







## ENVIRONMENTAL IMPACT per functional unit or declared unit (core indicators A2)

|                       | Unit                    | A1       | A2       | A3        | A1-A3     | A4       | A5       | B1       | B2       | B3       | B4       | B5       | B6       | B7       | C1       | C2       | C3       | C4       | D         |
|-----------------------|-------------------------|----------|----------|-----------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| GWP-total             | kg CO2 eq.              | 3,18E+02 | 7,89E+00 | 2,38E+01  | 3,50E+02  | 1,60E+01 | 4,26E+01 | 0,00E+00 | 8,96E+00 | 2,96E+02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,53E+00 | 7,96E-01 | 1,73E+01 | 1,48E-01 | -1,73E+02 |
| GWP-fossil            | kg CO2 eq.              | 3,15E+02 | 7,88E+00 | 2,99E+01  | 3,52E+02  | 1,60E+01 | 3,62E+01 | 0,00E+00 | 1,00E+01 | 2,95E+02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,53E+00 | 7,95E-01 | 1,71E+01 | 1,48E-01 | -1,70E+02 |
| GWP-biogenic          | kg CO2 eq.              | 7,69E-01 | 3,18E-03 | -6,12E+00 | -5,35E+00 | 6,68E-03 | 6,29E+00 | 0,00E+00 | 6,24E-03 | 1,04E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 3,58E-03 | 3,20E-04 | 1,72E-01 | 1,81E-04 | -6,30E-01 |
| GWP-luluc             | kg CO2 eq.              | 2,59E+00 | 2,89E-03 | 9,90E-02  | 2,70E+00  | 6,20E-03 | 1,13E-01 | 0,00E+00 | 1,69E+00 | 2,10E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,43E-03 | 2,92E-04 | 5,70E-03 | 4,15E-05 | -2,30E+00 |
| ODP                   | kg CFC11 eq.            | 2,90E-05 | 1,74E-06 | 3,96E-06  | 3,47E-05  | 3,51E-06 | 2,37E-06 | 0,00E+00 | 1,23E-06 | 3,51E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 7,08E-08 | 1,76E-07 | 1,46E-06 | 4,24E-08 | -1,27E-05 |
| AP                    | mol H+ eq.              | 1,90E+00 | 4,57E-02 | 2,32E-01  | 2,17E+00  | 1,09E-01 | 1,79E-01 | 0,00E+00 | 5,32E-02 | 1,25E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 6,71E-03 | 4,61E-03 | 3,78E-02 | 9,84E-04 | -1,14E+00 |
| EP-fresh water        | kg PO4 eq.              | 1,36E-02 | 7,94E-05 | 9,49E-04  | 1,46E-02  | 1,57E-04 | 1,09E-03 | 0,00E+00 | 2,63E-04 | 7,26E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 4,00E-05 | 8,01E-06 | 2,68E-04 | 1,56E-06 | -7,22E-03 |
| EP-marine             | kg N eq.                | 2,77E-01 | 1,61E-02 | 7,03E-02  | 3,64E-01  | 3,58E-02 | 2,81E-02 | 0,00E+00 | 2,71E-02 | 2,82E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 9,53E-04 | 1,63E-03 | 7,29E-03 | 3,51E-04 | -1,41E-01 |
| EP-terrestrial        | mol N eq.               | 3,20E+00 | 1,78E-01 | 7,86E-01  | 4,16E+00  | 3,96E-01 | 3,26E-01 | 0,00E+00 | 1,79E-01 | 3,24E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,12E-02 | 1,79E-02 | 8,23E-02 | 3,77E-03 | -1,75E+00 |
| POCP                  | kg NMVOC eq.            | 9,79E-01 | 5,07E-02 | 2,15E-01  | 1,24E+00  | 1,12E-01 | 9,02E-02 | 0,00E+00 | 4,14E-02 | 8,67E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,91E-03 | 5,11E-03 | 2,28E-02 | 1,09E-03 | -5,38E-01 |
| ADP-minerals & metals | kg Sb eq.               | 2,62E-02 | 2,00E-04 | 1,21E-02  | 3,86E-02  | 3,93E-04 | 9,45E-04 | 0,00E+00 | 1,95E-04 | 4,59E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 6,26E-06 | 2,01E-05 | 1,54E-04 | 9,50E-07 | 7,39E-02  |
| ADP-fossil            | MJ, net calorific value | 4,39E+03 | 1,19E+02 | 4,23E+02  | 4,93E+03  | 2,39E+02 | 5,04E+02 | 0,00E+00 | 1,02E+02 | 4,19E+03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,20E+01 | 1,20E+01 | 6,99E+01 | 3,00E+00 | -2,00E+03 |
| WDP                   | m3 world eq. Deprived   | 1,15E+02 | 4,25E-01 | 1,37E+01  | 1,29E+02  | 8,38E-01 | 6,70E+00 | 0,00E+00 | 3,76E+00 | 6,65E+01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,71E-01 | 4,29E-02 | 2,26E+00 | 3,19E-02 | -3,09E+01 |

GWP-total = Global Warming Potential total

GWP-fossil = Global Warming Potential fossil fuels

GWP-biogenic = Global Warming Potential biogenic total

GWP-luluc = Global Warming Potential land use and land use change

ODP = Depletion potential of the stratospheric ozone layer

AP = Acidification Potential, Accumulated Exceedence

EP-freshwater = Eutrophication Potential, fraction of nutrients reaching freshwater end compartment

EP-marine = Eutrophication Potential, fraction of nutrients reaching marine end compartment

EP-terrestrial = Eutrophication Potential, Accumulated Exceedence

POCP = Formation potential of tropospheric ozone photochemical oxidants

ADP-minerals & metals = Abiotic Depletion Potential for non-fossil resources [1]

ADP-fossil = Abiotic Depletion for fossil resources potential [1]

WDP = Water (user) deprivation potential, deprivation-weighted water consumption [1]

### Disclaimer [1]:

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.





## ENVIRONMENTAL IMPACT per functional unit or declared unit (additional indicators A2)

| Unit   |                   | A1       | A2       | A3       | A1-A3    | A4       | A5       | B1       | B2       | B3       | B4       | B5       | B6       | B7       | C1       | C2       | C3       | C4       | D         |
|--------|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| PM     | Disease incidence | 1,74E-05 | 7,06E-07 | 1,12E-06 | 1,93E-05 | 1,39E-06 | 9,40E-07 | 0,00E+00 | 6,30E-07 | 1,17E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,63E-08 | 7,13E-08 | 4,17E-07 | 1,95E-08 | -1,09E-05 |
| IRP    | kBq U235 eq.      | 1,77E+01 | 4,98E-01 | 1,69E+00 | 1,99E+01 | 1,00E+00 | 1,78E+00 | 0,00E+00 | 3,88E-01 | 1,43E+01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 7,17E-02 | 5,02E-02 | 3,03E-01 | 1,26E-02 | -7,57E+00 |
| ETP-fw | CTUe              | 1,01E+04 | 1,06E+02 | 8,25E+02 | 1,11E+04 | 2,11E+02 | 6,38E+02 | 0,00E+00 | 2,30E+02 | 9,15E+03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,63E+01 | 1,07E+01 | 6,98E+02 | 3,79E+02 | -3,88E+03 |
| HTP-c  | CTUh              | 6,78E-07 | 3,44E-09 | 3,06E-08 | 7,12E-07 | 7,12E-09 | 3,02E-08 | 0,00E+00 | 1,01E-08 | 1,30E-07 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 3,92E-10 | 3,47E-10 | 8,71E-09 | 5,70E-11 | -3,12E-07 |
| HTP-nc | CTUh              | 8,57E-06 | 1,16E-07 | 6,45E-07 | 9,33E-06 | 2,29E-07 | 5,35E-07 | 0,00E+00 | 1,89E-07 | 3,53E-06 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,42E-08 | 1,17E-08 | 2,60E-07 | 1,89E-09 | -2,69E-06 |
| SQP    | -                 | 9,73E+02 | 1,03E+02 | 8,81E+02 | 1,96E+03 | 2,01E+02 | 1,46E+02 | 0,00E+00 | 1,86E+02 | 1,22E+03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 5,03E+00 | 1,04E+01 | 5,27E+01 | 6,28E+00 | -6,10E+02 |

|        |   |   |
|--------|---|---|
| PM     | = | Potential incidence of disease due to PM emissions          |
| IRP    | = | Potential Human exposure efficiency relative to U235 [1]    |
| ETP-fw | = | Potential Comparative Toxic Unit for ecosystems [2]         |
| HTP-c  | = | Potential Comparative Toxic Unit for humans [2]             |
| HTP-nc | = | Potential Comparative Toxic Unit for humans, non-cancer [2] |
| SQP    | = | Potential soil quality index [2]                            |

### Disclaimer [1]:

- This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste.

### Disclaimer [2]:

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.





## OUTPUT FLOWS AND WASTE CATEGORIES per functional unit or declared unit (A1 en A2)

|      | Unit | A1       | A2       | A3       | A1-A3    | A4       | A5       | B1       | B2       | B3       | B4       | B5       | B6       | B7       | C1       | C2       | C3       | C4       | D         |
|------|------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| HWD  | kg   | 6,44E-02 | 3,01E-04 | 4,89E-02 | 1,14E-01 | 5,91E-04 | 6,60E-03 | 0,00E+00 | 2,00E-04 | 7,87E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 4,37E-06 | 3,04E-05 | 1,26E-01 | 3,44E-06 | 1,58E-01  |
| NHWD | kg   | 7,32E+01 | 7,54E+00 | 5,57E+00 | 8,63E+01 | 1,46E+01 | 9,28E+00 | 0,00E+00 | 2,92E+01 | 1,06E+02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 8,52E-02 | 7,61E-01 | 8,27E+00 | 1,92E+01 | -3,92E+01 |
| RWD  | kg   | 2,11E-02 | 7,82E-04 | 2,07E-03 | 2,39E-02 | 1,57E-03 | 2,35E-03 | 0,00E+00 | 5,74E-04 | 2,47E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 9,98E-05 | 7,89E-05 | 3,11E-04 | 1,93E-05 | -6,93E-03 |
| CRU  | kg   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| MFR  | kg   | 0,00E+00 | 0,00E+00 | 4,12E+00 | 4,12E+00 | 0,00E+00 | 2,26E+00 | 0,00E+00 | 0,00E+00 | 8,02E+01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 6,44E+01 | 0,00E+00 | 0,00E+00  |
| MER  | kg   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| EEE  | MJ   | 0,00E+00 | 0,00E+00 | 1,72E+00 | 1,72E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 3,28E+01  |
| ETE  | MJ   | 0,00E+00 | 0,00E+00 | 2,97E+00 | 2,97E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 5,64E+01  |

HWD = Hazardous Waste Disposed  
 NHWD = Non Hazardous Waste Disposed  
 RWD = Radioactive Waste Disposed  
 CRU = Components for reuse  
 MFR = Materials for recycling  
 MER = Materials for energy recovery  
 EEE = Exported Electrical Energy  
 ETE = Exported Thermal Energy



## RESOURCE USE per functional unit or declared unit (A1 and A2)

|       | Unit | A1       | A2       | A3       | A1-A3    | A4       | A5       | B1       | B2       | B3       | B4       | B5       | B6       | B7       | C1       | C2       | C3       | C4       | D         |
|-------|------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| PERE  | MJ   | 8,85E+02 | 1,49E+00 | 1,08E+02 | 9,95E+02 | 2,95E+00 | 9,17E+01 | 0,00E+00 | 2,91E+01 | 3,14E+02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 3,84E+00 | 1,50E-01 | 7,45E+00 | 6,21E-02 | -6,42E+02 |
| PERM  | MJ   | 0,00E+00 | 0,00E+00 | 5,18E+01 | 5,18E+01 | 0,00E+00 | 1,55E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| PERT  | MJ   | 8,85E+02 | 1,49E+00 | 1,60E+02 | 1,05E+03 | 2,95E+00 | 9,33E+01 | 0,00E+00 | 2,91E+01 | 3,14E+02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 3,84E+00 | 1,50E-01 | 7,45E+00 | 6,21E-02 | -6,42E+02 |
| PENRE | MJ   | 4,58E+03 | 1,26E+02 | 4,30E+02 | 5,13E+03 | 2,54E+02 | 5,34E+02 | 0,00E+00 | 1,10E+02 | 4,29E+03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,34E+01 | 1,27E+01 | 7,45E+01 | 3,18E+00 | -2,12E+03 |
| PENRM | MJ   | 4,98E+01 | 0,00E+00 | 1,97E+01 | 6,95E+01 | 0,00E+00 | 2,09E+00 | 0,00E+00 | 0,00E+00 | 8,70E+01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | -1,10E+01 |
| PENRT | MJ   | 4,63E+03 | 1,26E+02 | 4,50E+02 | 5,20E+03 | 2,54E+02 | 5,36E+02 | 0,00E+00 | 1,10E+02 | 4,37E+03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,34E+01 | 1,27E+01 | 7,45E+01 | 3,18E+00 | -2,13E+03 |
| SM    | kg   | 9,37E+00 | 0,00E+00 | 9,80E-01 | 1,04E+01 | 0,00E+00 | 3,11E-01 | 0,00E+00 | 0,00E+00 | 5,02E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 8,94E-02  |
| RSF   | MJ   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| NSRF  | MJ   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| FW    | m3   | 6,44E+00 | 1,45E-02 | 5,08E-01 | 6,96E+00 | 2,86E-02 | 2,71E-01 | 0,00E+00 | 1,66E-01 | 2,11E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,93E-03 | 1,46E-03 | 7,64E-02 | 3,38E-03 | -3,21E+00 |

|       |   |  |
|-------|---|--|
| PERE  | = | Use of renewable energy excluding renewable primary energy resources   |
| PERM  | = | Use of renewable energy resources used as raw materials  |
| PERT  | = | Total use of renewable primary energy resources  |
| PENRE | = | Use of non-renewable primary energy resources excluding non-renewable energy resources used as raw materials |
| PENRM | = | Use of non-renewable primary energy resources used as raw materials  |
| PENRT | = | Total use of non-renewable primary energy resources  |
| SM    | = | Use of secondary materials   |
| RSF   | = | Use of renewable secondary fuels   |
| NSRF  | = | Use of non-renewable secondary fuels   |
| FW    | = | Use of net fresh water   |

## BIOGENIC CARBON CONTENT per functional unit or declared unit (A1 and A2)

|       | Unit | A1       | A2       | A3       | A1-A3    | A4       | A5       | B1       | B2       | B3       | B4       | B5       | B6       | B7       | C1       | C2       | C3       | C4       | D        |
|-------|------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| BBCpr | kg C | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| BCCpa | kg C | 0,00E+00 | 0,00E+00 | 6,17E+00 | 6,17E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

|       |   |                                      |
|-------|---|--------------------------------------|
| BCCpr | = | Biogenic carbon content in product   |
| BCCpa | = | Biogenic carbon content in packaging |



## CALCULATION RULES (PART 1)

### CUT-OFF CRITERIA

There is no cut-off applied for the inputs or outputs of any of the processes.

### GLASS DATA SOURCE

Guardian EPD based on GaBi background data.

## CALCULATION RULES (PART 2)

### TIME PERIOD DATA COLLECTION

Background data is primarily based on Ecolvent 3.6. Foreground data is <2 years and background data <10 years. The data quality is considered to be good.

Material quantities: design specific

Suppliers: FY2024

Factory: Calendar Year 2020-2024

Building site: following CWCT

Emissions: n/a

Fiscal Year 2024 (referred to FY2024 henceforth) refers to the financial year starting from 1st of April 2023, and ending on 31st of March 2024.

## CALCULATION RULES (PART 3)

### ALLOCATION

Allocation is applied for recycling at end-of-life of various materials according to EN 15804 rules.

## SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION (PART 1)

### Life cycle stages A1-A3 (production)

Permasteelisa S.p.A. produce the curtain wall panels in their factory in Vittorio Veneto. The various parts and materials are sourced from various suppliers as semi-finished products, enter the factory and are assembled into a facade panel. After assembly, the facade elements are packed and made ready for transport to the building site together with the brackets and other materials for fixing and/or closure.

Semi-finished products of the suppliers (cradle to supplier gate) are included in stage A1 of this LCA study. The transport movements between suppliers and Permasteelisa S.p.A. are included in stage A2 and all activities in the Permasteelisa S.p.A. assembly location in Vittorio Veneto are included in stage A3. The production stage consists of the extraction of raw materials, transportation of the raw materials, processing the raw materials into sub-components and the assembly of the sub-components into the end-product. The required energy for production, external treatments, ancillary materials, packaging material and production emissions are included.

| Supplier distances (stage A2)     | km  |
|-----------------------------------|-----|
| Glazing                           | 815 |
| Aluminium profiles                | 458 |
| Aluminium sheet work              | 205 |
| Mineral wool                      | 321 |
| Steel sheet work                  | 232 |
| Fasteners                         | 240 |
| Gaskets                           | 283 |
| Sealant, incl. primer and cleaner | 420 |
| Packaging                         | 10  |



## SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION (PART 2)

### Life cycle stages A4-A5 (construction)

This stage consists of the transport of the product from production plant to the construction site. It also includes the loss of material during construction. The additional needed production, transport and end-of-life treatment of the lost material during construction is included. The end-of-life of packaging material up to the end-of-waste state or disposal of final residues is also included. The energy use for installation of the product is taken into account following the CWCT methodology.

The facade elements are delivered on the building site including fastening and closure materials (floor brackets and fire stop). The facade elements are lifted onto the floors of the building and installed. After that, the floor edge detail is completed by applying the mineral wool and steel sheets.

The transport movements between Permasteelisa S.p.A. Vittorio Veneto and the building site are included in stage A4. All activities on the building site are included in stage A5.

Transport to the construction site consists of the following:

| Transport conveyance                     | Distance | Transported mass [kg] |
|--|----------|-----------------------|
| Lorry (truck): Vittorio Veneto-Rotterdam | 1215 km  |                       |
| Transoceanic ship: Rotterdam-Dublin Port | 1187 km  |                       |
| Lorry (truck): Dublin Port - Site        | 5 km     |                       |
| Total:                                   | 2407 km  | 92,531                |

## SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION (PART 3)

### Life cycle stages B1-B3 (use stage)

This stage consists of the impacts arising from components of the building and construction works during their use. The facade construction itself is assumed to have negligible environmental impact during its use stage B1. Cleaning of the facade needs to be done twice a year and is modelled in stage B2 following CWCT in accordance with EN 17074.

The facade consists of various parts with different service lifetimes. During the reference service life (RSL) of the facade (60 years), several parts like glazing, sealants and gaskets need to be replaced. The replacement of these parts has been accounted for in life cycle stage B3. Product replacement (B4) and renovation (B5) are not considered. Operational water and energy use (B6-7) are not considered.

### Life cycle stages C1-C4 (end of life)

When the end of the life stage of the building is reached, the de-construction/demolition begins. This EPD includes de-construction/demolition (C1), the necessary transport (C2) from the demolition site to the sorting location and distance to final disposal. The end of life stage includes the final disposal to landfill (C4), incineration (C3) and needed recycling processes up to the end-of-waste point (C3). Loads and benefits of recycling, re-use and exported energy are part of module D.

The default end-of-life scenarios of the annex (May 2024) to the NMD Determination method v1.1 have been used for the various materials in the product.

| Waste scenario              | Landfill [%] | Incineration [%] | Recycling [%] |
|-----------------------------|--------------|------------------|---------------|
| Glazing                     | 30           | 0                | 70            |
| Aluminium                   | 3            | 3                | 94            |
| Mineral wool insulation     | 85           | 5                | 10            |
| Steel sheets and brackets   | 5            | 0                | 95            |
| Gaskets                     | 10           | 85               | 5             |
| Chromium steel              | 1            | 0                | 99            |
| Sealant, primer, cleaner    | 0            | 100              | 0             |
| Packaging, wood and plastic | 10           | 85               | 5             |

| Transport by "Lorry (Truck), unspecified (default)   market group for (GLO)" | Distance [km] |
|--|---------------|
| Landfill   | 100           |
| Incineration   | 150           |
| Recycling  | 50            |



## SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION (PART 5)

Life cycle stage D (benefits and loads beyond the system boundary)

This stage contains the potential loads and benefits of recycling and re-use of raw materials/products. The loads contain the needed recycling processes from end-of-waste-point up to the point-of-equivalence of the substituted primary raw material and a load for secondary material that will be lost at the end-of-life stage. The loads and benefits of recycling and reuse are included in this module. The benefits are calculated based on the primary content and the primary equivalent. In addition, the benefits of energy recovery are granted at this stage. The amount of avoided energy is based on the Lower Heating Values of the materials and the efficiencies of the incinerators as mentioned in the NMD Determination method v1.1 or EcoInvent 3.6 (2019).

## DECLARATION OF SVHC

The product does not contain any substances listed in the "Candidate List of Substances of Very High Concern (SVHC) for authorisation" exceeding 0.1% of the weight of the product.

## REFERENCES

CWCT

Centre for Window and Cladding Technology

"How to calculate the embodied carbon of facades: A methodology", Issue 1, September 2022

EN 15804+A2

EN 15804+A2: 2019: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

ISO 14040

ISO 14040:2006-10, Environmental management - Life cycle assessment - Principles and framework; EN ISO 14040:2006

ISO 14044

ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines; EN ISO 14040:2006

ISO 14025

ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

MRPI verification protocol

MRPI®-EPD verification protocol November 2020.v4.0

NMD

Nationale Milieu Database (Dutch National Environmental Database) Determination method

## REMARKS

This declaration is only valid for the specific design of this project and facade type.