

HEKON

Environmental Product Declaration

According to EN15804+A2

This declaration is for:
Nailclip 16-19 mm, 812R

Provided by:
Hekon



MRPI® registration:
1.1.00971.2025

Program operator:
Stichting MRPI®
Publisher:
Stichting MRPI®
www.mrpi.nl

Date of first issue:
27-8-2025
Date of this issue:
27-8-2025
Expiry date:
27-8-2030

HEKON

COMPANY INFORMATION

Hekon
Hulsenweg 2a
6031 SP
Nederweert
Netherlands
+31 (0)478 - 51 08 15
info@hekonbv.nl
<https://www.hekonbv.nl/>

MRPI® REGISTRATION

1.1.00971.2025

DATE OF THIS ISSUE

27-8-2025

EXPIRY DATE

27-8-2030

SCOPE OF DECLARATION

This MRPI®-EPD certificate is verified by Gert-Jan Vroege, Eco Intelligence. The LCA study has been done by Steven Simons, SGS INTRON B.V.. The certificate is based on an LCA-dossier according to EN15804+A2. It is verified according to the 'MRPI®-EPD verification protocol November 2020.v4.0'. EPDs of construction products may not be comparable if they do not comply with EN15804+A2. Declaration of SVHC that are listed on the 'Candidate list of Substances of Very High Concern for authorisation' when content exceeds the limits for registration with ECHA.

PROGRAM OPERATOR

Stichting MRPI®
Kingsfordweg 151
1043 GR
Amsterdam

PRODUCT

Nailclip 16-19 mm, 812R

DECLARED UNIT / FUNCTIONAL UNIT

1 Piece

DESCRIPTION OF PRODUCT



A nailclip is a fastener used to neatly and securely route cables or pipes along walls or skirting boards. It consists of a plastic clip with a pre-mounted nail. The clip is placed over the cable and then secured to the wall or wood with the nail.

VISUAL PRODUCT



MORE INFORMATION

<https://t-plastique.com/>

Ing. L. L. Oosterveen MSc. MBA Managing Director MRPI 	DEMONSTRATION OF VERIFICATION
	CEN standard EN15804 serves as the core PCR [1]
	Independent verification of the declaration an data according to EN15804+A2 Internal: External: X
	Third party verifier: Gert-Jan Vroege, Eco Intelligence  [1] PCR = Product Category Rules

HEKON

DETAILED PRODUCT DESCRIPTION (PART 1)

Product: A nailclip is a fastener used to neatly and securely route cables or pipes along walls or skirting boards. It consists of a plastic clip with a pre-mounted nail. The clip is placed over the cable and then secured to the wall or wood with the nail.

Production (A1-A3): The injection molding process is a production technique for manufacturing plastic parts. Plastic granulate is first heated until it melts, after which the liquid material is injected into a closed mold under high pressure. The choice of material is crucial and depends on the required properties of the product. The mold determines the shape of the final product. After cooling, the plastic solidifies, and the molded product is removed from the mold. This process is fast, precise, and suitable for producing large quantities of identical products with complex shapes.

Reference service life: 25+ years

DETAILED PRODUCT DESCRIPTION (PART 2)

The energy processes used in the calculation are listed in the table below. The process used for the energy was: 25% Electricity, low voltage {NL}| electricity production, photovoltaic, 3kWp slanted-roof installation, single-Si, panel, mounted | Cut-off, U and 75% Electricity, low voltage {NL}| market for electricity, low voltage | Cut-off, U

Global warming potential of 1 kWh energy	Process	kg CO ₂ eq
Production energy: Solar	Electricity, low voltage {NL} electricity production, photovoltaic, 3kWp slanted-roof installation, single-Si, panel, mounted Cut-off, U	0,11
Production energy: Netherlands	Electricity, low voltage {NL} market for electricity, low voltage Cut-off, U	0,496

SCOPE AND TYPE

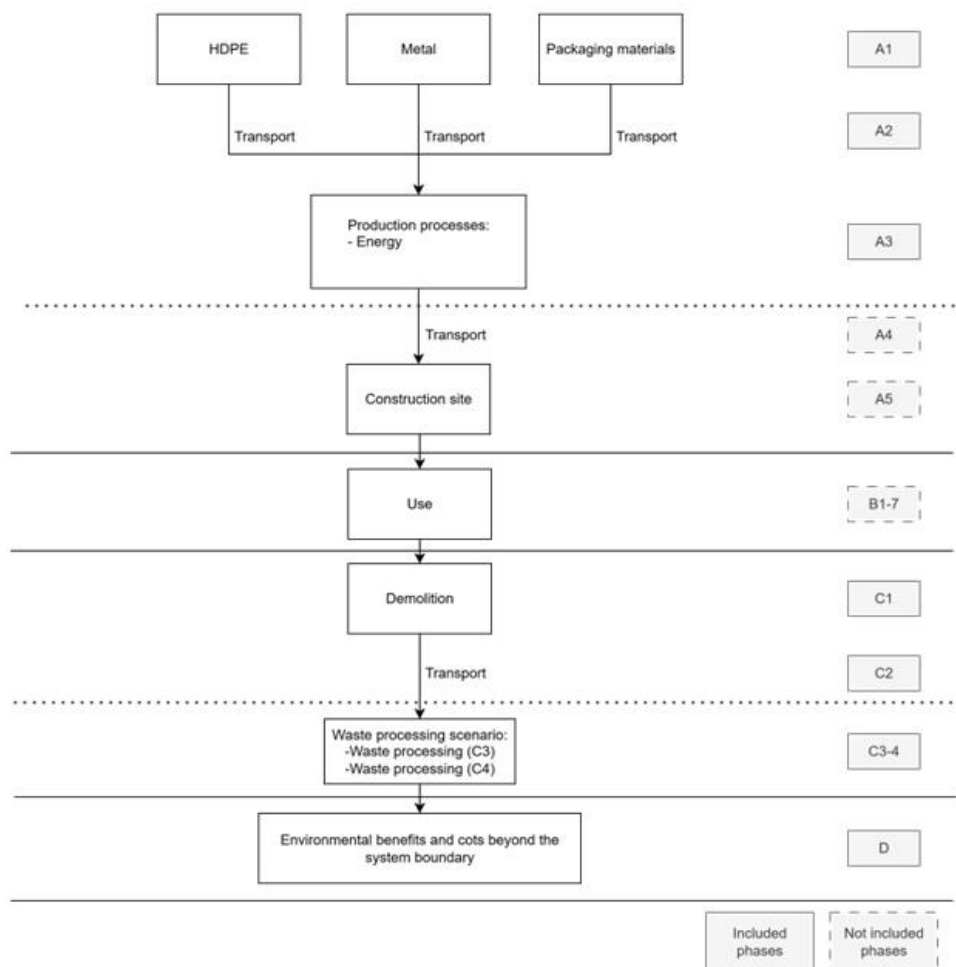
The LCA for the nailclip includes modules A1-A3, C and D. All major steps of the extraction of raw materials, production and the end-of-life of the product are included in the scope of the study. This EPD is for a nailclip, a fastener used to neatly and securely route cables or pipes along walls or skirting boards. The nailclip is produced by Technique Plastique. The main production location is Nederweert, The Netherlands. The end-of-life scenario is according to the standard NMD waste processing for plastics (20% landfill and 80% incineration) and for metal (5% landfill, 5% incineration and 90% recycling). The LCA is produced with SimaPro v10 software and background database is Ecoinvent 3.9.1.

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport gate to site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse - Recovery - Recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X

X = Modules Assessed

ND = Not Declared

HEKON



REPRESENTATIVENESS

The EPD is representative for a nailclip, a fastener used to neatly and securely route cables or pipes along walls or skirting boards which is manufactured in Nederweert, The Netherlands.

HEKON

ENVIRONMENTAL IMPACT per functional unit or declared unit (core indicators A2)

Unit		A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-total	kg CO2 eq.	5,48E-03	5,72E-05	8,82E-04	6,42E-03	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	4,52E-05	6,18E-04	3,72E-03	-3,18E-03
GWP-fossil	kg CO2 eq.	6,10E-03	5,69E-05	8,79E-04	7,04E-03	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	4,50E-05	6,20E-04	3,72E-03	-3,20E-03
GWP-biogenic	kg CO2 eq.	-6,46E-04	8,87E-08	3,22E-06	-6,43E-04	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	7,02E-08	-2,07E-06	1,49E-07	1,50E-05
GWP-luluc	kg CO2 eq.	2,67E-05	2,03E-07	3,57E-07	2,73E-05	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	1,60E-07	4,37E-07	1,35E-08	2,25E-07
ODP	kg CFC11 eq.	9,83E-11	1,00E-12	4,65E-11	1,46E-10	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	8,00E-13	6,10E-12	1,10E-12	-1,55E-10
AP	mol H+ eq.	5,96E-05	2,72E-07	2,49E-06	6,24E-05	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	2,15E-07	1,98E-06	5,11E-07	-4,23E-06
EP-fresh water	kg PO4 eq.	5,32E-07	5,66E-10	2,08E-08	5,53E-07	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	4,48E-10	1,17E-08	5,35E-10	7,90E-08
EP-marine	kg N eq.	7,45E-06	1,04E-07	4,68E-07	8,02E-06	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	8,19E-08	5,53E-07	2,48E-07	-1,05E-06
EP-terrestrial	mol N eq.	2,07E-04	1,10E-06	5,33E-06	2,13E-04	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	8,73E-07	6,02E-06	2,61E-06	-1,55E-05
POCP	kg NMVOC eq.	2,68E-05	3,77E-07	2,72E-06	2,99E-05	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	2,98E-07	2,18E-06	6,71E-07	-1,01E-05
ADP-minerals & metals	kg Sb eq.	1,33E-07	1,78E-10	5,40E-09	1,38E-07	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	1,41E-10	4,54E-09	8,57E-11	-1,24E-08
ADP-fossil	MJ, net calorific value	1,03E-01	8,15E-04	1,61E-02	1,20E-01	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	6,44E-04	6,24E-03	4,51E-04	-4,27E-02
WDP	m3 world eq. Deprived	2,00E-03	4,45E-06	4,42E-04	2,45E-03	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	3,52E-06	7,74E-05	7,69E-06	-1,54E-03

GWP-total	=	Global Warming Potential total
GWP-fossil	=	Global Warming Potential fossil fuels
GWP-biogenic	=	Global Warming Potential biogenictotal
GWP-luluc	=	Global Warming Potential land use and land use change
ODP	=	Depletion potential of the stratospheric ozone layer
AP	=	Acidification Potential, Accumulated Exceedence
EP-freshwater	=	Eutrophication Potential, fraction of nutrients reaching freshwater end compartment
EP-marine	=	Eutrophication Potential, fraction of nutrients reaching marine end compartment
EP-terrestrial	=	Eutrophication Potential, Accumulated Exceedence
POCP	=	Formation potential of tropospheric ozone photochemical oxidants
ADP-minerals & metals	=	Abiotic Depletion Potential for non-fossil resources [1]
ADP-fossil	=	Abiotic Depletion for fossil resources potential [1]
WDP	=	Water (user) deprivation potential, deprivation-weighted water consumption [1]

Disclaimer [1]:

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

HEKON

ENVIRONMENTAL IMPACT per functional unit or declared unit (additional indicators A2)

Unit		A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PM	Disease incidence	7,24E-10	5,60E-12	1,88E-11	7,49E-10	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	4,40E-12	3,86E-11	3,00E-12	-1,00E-10
IRP	kBq U235 eq.	1,02E-04	3,18E-07	1,38E-05	1,16E-04	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	2,51E-07	8,64E-06	2,27E-07	1,44E-05
ETP-fw	CTUe	6,28E-02	6,01E-04	3,72E-03	6,71E-02	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	4,76E-04	2,74E-03	1,46E-03	4,77E-03
HTP-c	CTUh	2,87E-11	0,00E+00	4,00E-13	2,91E-11	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	6,00E-13	1,00E-13	1,11E-11
HTP-nc	CTUh	1,26E-10	7,00E-13	7,30E-12	1,34E-10	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	5,00E-13	7,80E-12	5,70E-12	9,14E-11
SQP	-	3,42E-02	6,43E-04	8,57E-03	4,35E-02	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	5,09E-04	5,17E-03	3,34E-04	-1,82E-03

PM	=	Potential incidence of disease due to PM emissions
IRP	=	Potential Human exposure efficiency relative to U235 [1]
ETP-fw	=	Potential Comparative Toxic Unit for ecosystems [2]
HTP-c	=	Potential Comparative Toxic Unit for humans, cancer [2]
HTP-nc	=	Potential Comparative Toxic Unit for humans, non-cancer [2]
SQP	=	Potential soil quality index [2]

Disclaimer [1]:

- This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste.

Disclaimer [2]:

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

HEKON

OUTPUT FLOWS AND WASTE CATEGORIES per functional unit or declared unit (A1 en A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HWD	kg	8,74E-07	5,19E-09	1,24E-07	1,00E-06	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	4,11E-09	2,33E-08	5,19E-09	-3,28E-07
NHWD	kg	1,78E-03	5,38E-05	7,44E-05	1,91E-03	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	4,26E-05	3,01E-04	4,19E-04	1,87E-04
RWD	kg	6,65E-08	1,86E-10	1,13E-08	7,79E-08	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	1,48E-10	6,41E-09	1,43E-10	9,57E-09
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	1,41E-03	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,29E-03	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	9,30E-03	0,00E+00
ETE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,60E-02	0,00E+00

HWD	=	Hazardous Waste Disposed
NHWD	=	Non Hazardous Waste Disposed
RWD	=	Radioactive Waste Disposed
CRU	=	Components for reuse
MFR	=	Materials for recycling
MER	=	Materials for energy recovery
EEE	=	Exported Electrical Energy
ETE	=	Exported Thermal Energy

HEKON

RESOURCE USE per functional unit or declared unit (A1 and A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	1,03E-01	8,16E-04	1,61E-02	1,20E-01	INA	INA	INA	INA	INA	INA	INA	INA	INA	0,00E+00	6,45E-04	6,24E-03	4,51E-04	-4,27E-02
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	INA	INA	INA	INA	INA	INA	INA	INA	INA	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	8,90E-03	1,15E-05	2,87E-03	1,18E-02	INA	INA	INA	INA	INA	INA	INA	INA	INA	0,00E+00	9,11E-06	3,71E-04	1,09E-05	3,01E-04
PENRE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	INA	INA	INA	INA	INA	INA	INA	INA	INA	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	INA	INA	INA	INA	INA	INA	INA	INA	INA	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	1,03E-01	8,16E-04	1,61E-02	1,20E-01	INA	INA	INA	INA	INA	INA	INA	INA	INA	0,00E+00	6,45E-04	6,24E-03	4,51E-04	-4,27E-02
SM	kg	7,60E-04	0,00E+00	0,00E+00	7,60E-04	INA	INA	INA	INA	INA	INA	INA	INA	INA	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	INA	INA	INA	INA	INA	INA	INA	INA	INA	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NSRF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	INA	INA	INA	INA	INA	INA	INA	INA	INA	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m3	5,87E-05	1,97E-07	1,21E-05	7,10E-05	INA	INA	INA	INA	INA	INA	INA	INA	INA	0,00E+00	1,56E-07	2,40E-06	3,92E-07	-2,99E-05

PERE	=	Use of renewable primary energy excluding renewable primary energy used as raw materials
PERM	=	Use of renewable primary energy resources used as raw materials
PERT	=	Total use of renewable primary energy resources
PENRE	=	Use of non-renewable primary energy resources excluding non-renewable energy resources used as raw materials
PENRM	=	Use of non-renewable primary energy resources used as raw materials
PENRT	=	Total use of non-renewable primary energy resources
SM	=	Use of secondary materials
RSF	=	Use of renewable secondary fuels
NSRF	=	Use of non-renewable secondary fuels
FW	=	Use of net fresh water

BIOGENIC CARBON CONTENT per functional unit or declared unit (A1 and A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
BBCpr	kg C	0,00E+00	ND	ND	0,00E+00	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
BCCpa	kg C	1,89E-04	ND	ND	1,89E-04	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

BBCpr	=	Biogenic carbon content in product
BCCpa	=	Biogenic carbon content in packaging

CALCULATION RULES

Data quality requirements follow EN15804+A2:2019. Data is of reference period 2025, representing data for the production of one nailclip. Processes used in the background modelling are referring to Ecoinvent 3.9.1. The technological and geographical coverage reflects the physical reality as far as possible. Data quality is assessed as good on average and adequate to the goal and scope of the study. Cut-off criteria and allocation procedures: The waste treatment of the packaging is not included. No other cut-offs or allocation procedures were intentionally applied to inputs and outputs within the system boundaries in the models.

SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION (PART 1)

The product stage, A1-A3, includes the extraction and processing of raw materials for the product and the packaging, their transportation to the production site by truck and ship. Electricity consumption is modelled using primary data.

SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION (PART 2)

The end-of-life stage (C) is according to the standard NMD waste processing for plastics (20% landfill and 80% incineration) and for metal (5% landfill, 5% incineration and 90% recycling). Default waste transport distance is 100 km for landfill waste, 150 km for incineration and 50 km for recycling.

DECLARATION OF SVHC

No substances that are listed in the latest "Candidate List of Substances of Very High Concern for authorisation" are included in the product that exceed the limit for registration.

REFERENCES

Stichting nationale Milieudatabase, Bepalingsmethode Milieuprestatie Bouwwerken versie 1.2.

EN 15804:2012+A2:2019, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products, 2019.

ISO, ISO 14025:2006 Environmental labels and declarations — Type III environmental declarations — Principles and procedures, 2006.

SGS INTRON report: A163040/R20251340, August 2025