



PERMASTEELISA GROUP

**Environmental
Product
Declaration**


According to EN15804+A2 (+indicators A1)

This declaration is for:

Re-used window - Circular Facades pilot

Provided by:

Scheldebouw b.v. - Permasteelisa Group

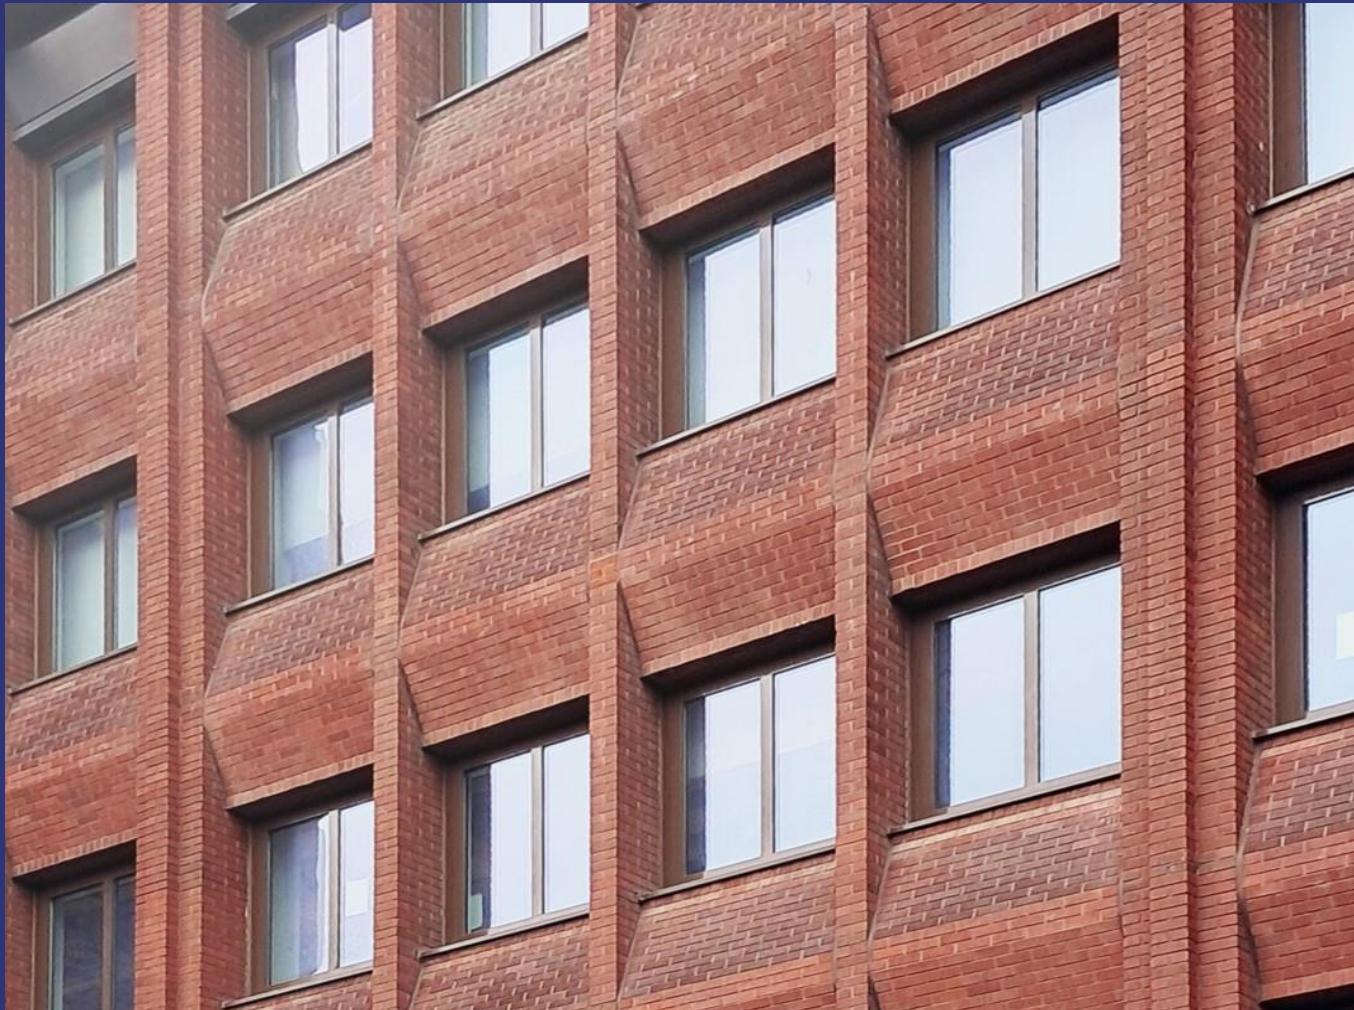

MRPI® registration:

1.1.01037.2025

Program operator:

Stichting MRPI®

Publisher:

Stichting MRPI®

www.mrpi.nl

Date of first issue:

27-11-2025

Date of this issue:

27-11-2025

Expiry date:

27-11-2030



**Nationale
MILIEUDATABASE**

Page 1 of 12





PERMASTEELISA GROUP

COMPANY INFORMATION

Scheldebouw b.v. - Permasteelisa Group

Herculesweg 17

4338 PL

Middelburg

Netherlands

+31 (0)118 679 900

scheldebouw@permasteelisagroup.com

<https://scheldebouw.permasteelisagroup.com>

MRPI® REGISTRATION

1.1.01037.2025

DATE OF THIS ISSUE

27-11-2025

EXPIRY DATE

27-11-2030

SCOPE OF DECLARATION

This MRPI®-EPD certificate is verified by B. Roijen, SGS INTRON b.v.. The LCA study has been done by L. Ceyhan-van Munster, Nibe b.v.. The certificate is based on an LCA-dossier according to EN15804+A2 (+indicators A1). It is verified according to the 'Verification protocol for MRPI LCA project report & EPD 21th of May 2025, V. 5.2'. EPDs of construction products may not be comparable if they do not comply with EN15804+A2. Declaration of SVHC that are listed on the 'Candidate list of Substances of Very High Concern for authorisation' when content exceeds the limits for registration with ECHA.

PRODUCT

Re-used window - Circular Facades pilot


DECLARED UNIT / FUNCTIONAL UNIT

1 Piece

DESCRIPTION OF PRODUCT

One re-used window of 5-7 years old with a size of 1660 x 1717 mm, sourced from a high-end project in London.

VISUAL PRODUCT

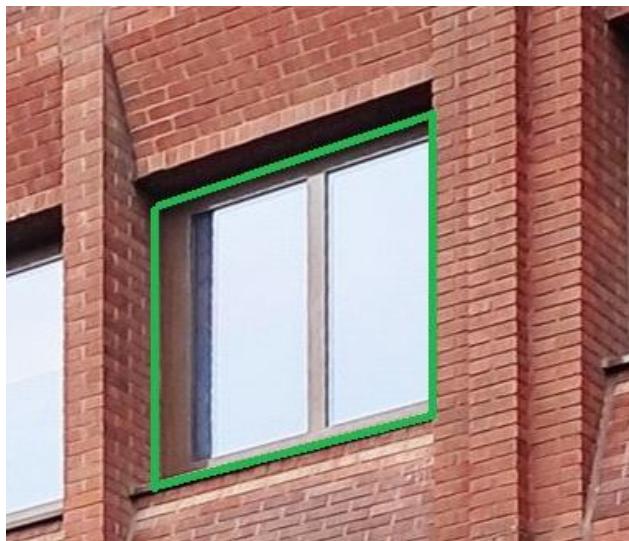

PROGRAM OPERATOR

Stichting MRPI®

Kingsfordweg 151

1043 GR

Amsterdam

MORE INFORMATION

<https://scheldebouw.permasteelisagroup.com>

Ing. L. L. Oosterveen MSc. MBA Managing Director MRPI	DEMONSTRATION OF VERIFICATION
	CEN standard EN15804 serves as the core PCR [1]
	Independent verification of the declaration and data according to EN15804+A2 (+indicators A1) Internal: <input checked="" type="checkbox"/> External: X
	Third party verifier: B. Roijen, SGS INTRON b.v. 
[1] PCR = Product Category Rules	



Page 2 of 12





DETAILED PRODUCT DESCRIPTION

One re-used window of 5-7 years old with the size (w x h) 1660 x 1717 mm and the following performance:

Thermal insulation:

$U_w = 1.8 \text{ W/m}^2\text{K}$

$U_g = 1.2 \text{ W/m}^2\text{K}$

Acoustic insulation:

Glazing: $R_w (\text{C;Ctr}) = 35 \text{ (-2;-5) dB}$

Window: $R_w (\text{C;Ctr}) = 32 \text{ (-2;-6) dB}$

Tightness:


Air permeability: Class 4

Water tightness: Class 4A

Glazing properties:

$L_t = 70\%$

g-value = 34%

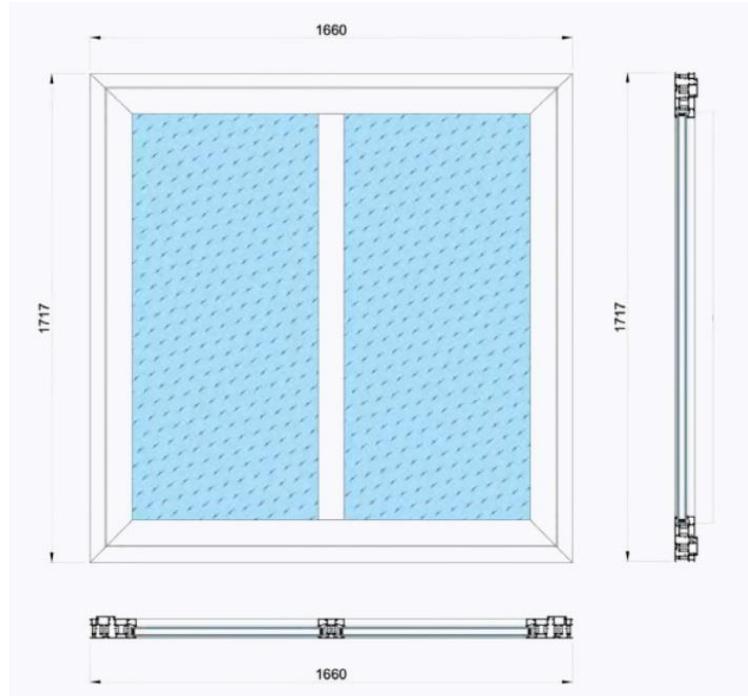

The reference service life (RSL) of the product and its constituent parts in the LCA is based on the estimated service life, as defined in BS ISO 15686-1, which Permasteelisa Group provides to the client in their general guarantees and warranties schedule.

The standard reference service life of windows and facades for Permasteelisa Group is 60 years. This means that after a service life of 5 years, a remaining service life of > 50 years can be assumed in line with the PCR for windows. Glazing and gaskets need to be replaced after 30 years due to aging of the materials, of which 25 years remain. Both components will be replaced once during the remaining service life of 50 years.

In the software R<THINK the replacement of these parts is accounted for in life cycle stage B3. (In other software packages this might be stage B4.) The complete end-of-life treatment of the replaced component and the production and installation of the new component are accounted for in this stage, multiplied by the number of replacement cycles. Unpredictable repair and replacement due to incidents is not taken into account in the EPD.





Product part	RSL
Laminated double glazing	25 years
EPDM gaskets	25 years
All other parts	50 years

Material	Mass [kg]
Laminated double glazing (6-20-33.1)	59,3
Aluminium profiles, powdercoated	30,4
Thermal breaks	5,4
EPDM gaskets	2
Fasteners and iron mongery (stainless steel)	2,9
Sealant	0,3
Total	100,3

SCOPE AND TYPE

The input data are representative for the Re-used Window as part of the Circular Facades pilot project by Scheldebouw B.V. in Middelburg, The Netherlands. The data are derived from the standard assumptions of our organisation's new-built EPDs and this specifically conducted case study. The Dutch predefined waste / end-of-life scenarios are used, because they are deemed most representative.

LCA method R<THINK: NMD Determination method v1.2 | set 1+2

LCA software**: Simapro 9.6

Characterisation method: Bepalingsmethode 'set1', 'set 2' & param (NMD 3.4) v1.00

LCA database profiles: Ecoinvent version 3.9.1 (version 3.6 for set 1)

Version database: v3.20b (2025-11-18)


(**) Used for calculating the characterised results of the environmental profiles within R<THINK.

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE						END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES	
Raw material supply	Transport	Manufacturing	Transport gate to site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse - Recovery - Recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
x	x	x	x	x	x	x	x	ND	ND	ND	ND	x	x	x	x	x

X = Modules Assessed

ND = Not Declared



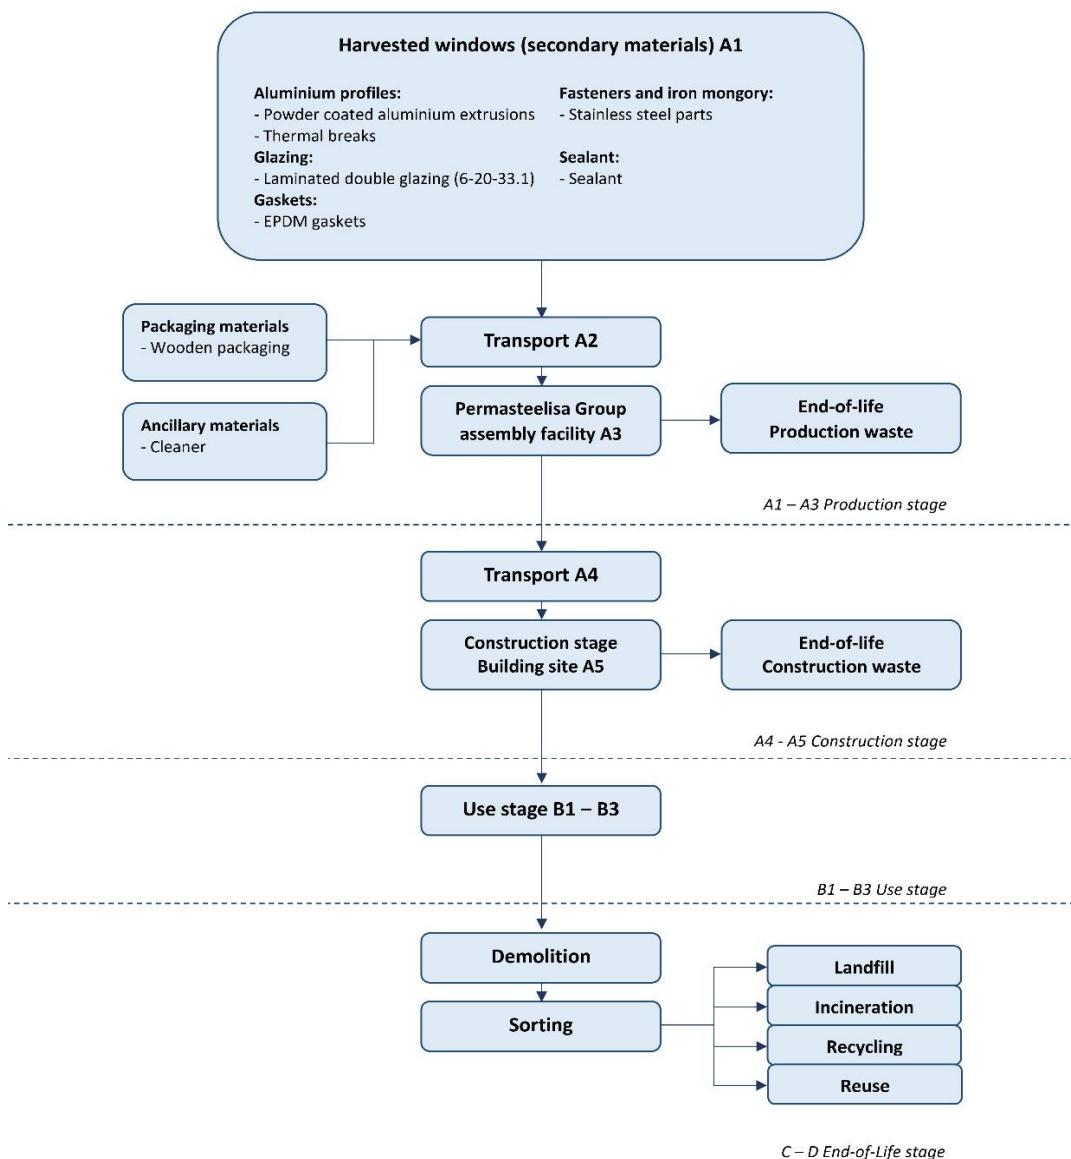

REPRESENTATIVENESS

The input data are representative for the Re-used Window as part of the Circular Facades pilot project by Scheldebouw B.V. in Middelburg, The Netherlands.





ENVIRONMENTAL IMPACT per functional unit or declared unit (indicators A1)

Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
ADPE	kg Sb eq.	0,00E+00	4,18E-05	5,67E-04	6,09E-04	8,99E-05	3,92E-04	0,00E+00	2,35E-04	8,24E-03	ND	ND	ND	2,11E-05	2,30E-05	1,80E-04	1,10E-06	1,17E-01
ADPF	MJ	0,00E+00	2,72E+01	7,90E+02	8,17E+02	5,38E+01	1,30E+03	0,00E+00	1,20E+02	1,90E+03	ND	ND	ND	8,07E+01	1,38E+01	7,79E+01	3,30E+00	-3,25E-01
GWP	kg CO2 eq.	0,00E+00	1,82E+00	4,61E+01	4,79E+01	3,52E+00	8,44E+01	0,00E+00	1,89E+01	1,39E+02	ND	ND	ND	5,16E+00	9,02E-01	2,67E+01	2,55E-01	1,89E+00
ODP	kg CFC11 eq.	0,00E+00	3,19E-07	3,66E-06	3,98E-06	6,24E-07	4,44E-06	0,00E+00	8,31E-07	1,84E-05	ND	ND	ND	2,55E-07	1,60E-07	9,31E-07	3,63E-08	-2,32E-07
POCP	kg ethene eq.	0,00E+00	1,29E-03	5,00E-02	5,13E-02	2,12E-03	1,73E-02	0,00E+00	6,10E-03	6,39E-02	ND	ND	ND	7,68E-04	5,44E-04	3,22E-03	1,39E-04	-7,25E-03
AP	kg SO2 eq.	0,00E+00	1,38E-02	1,61E-01	1,75E-01	1,55E-02	1,76E-01	0,00E+00	3,76E-02	8,77E-01	ND	ND	ND	9,66E-03	3,97E-03	3,64E-02	8,39E-04	-3,66E-02
EP	kg (PO4) 3 eq.	0,00E+00	2,10E-03	3,45E-02	3,66E-02	3,04E-03	3,70E-02	0,00E+00	2,37E-02	8,95E-02	ND	ND	ND	1,99E-03	7,79E-04	4,49E-03	1,89E-04	-2,20E-02

Toxicity indicators and ECI (Dutch market)

HTP	kg DCB eq.	0,00E+00	8,04E-01	5,01E+01	5,09E+01	1,48E+00	1,30E+01	0,00E+00	5,53E+00	6,80E+01	ND	ND	ND	ND	5,80E-01	3,80E-01	6,97E+00	5,97E-02	1,22E-01
FAETP	kg DCB eq.	0,00E+00	2,16E-02	2,21E+00	2,23E+00	4,33E-02	3,53E-01	0,00E+00	3,38E+01	1,20E+00	ND	ND	ND	ND	1,60E-02	1,11E-02	2,21E-01	9,07E-03	3,40E-01
MAETP	kg DCB eq.	0,00E+00	8,03E+01	1,06E+03	1,14E+03	1,56E+02	1,19E+03	0,00E+00	2,66E+02	5,17E+03	ND	ND	ND	ND	6,75E+01	3,99E+01	5,05E+02	1,20E+01	7,01E+02
TETP	kg DCB eq.	0,00E+00	2,75E-03	5,15E-01	5,18E-01	5,24E-03	4,25E-01	0,00E+00	1,50E+01	2,20E-01	ND	ND	ND	ND	2,63E-02	1,34E-03	1,62E-02	1,76E-04	-1,78E-02
ECI	euro	0,00E+00	2,51E-01	8,13E+00	8,39E+00	4,24E-01	6,72E+00	0,00E+00	3,77E+00	1,82E+01	ND	ND	ND	ND	3,83E-01	1,09E-01	2,22E+00	2,52E-02	-1,55E-01
ADPF	kg Sb eq.	0,00E+00	1,31E-02	3,80E-01	3,93E-01	2,59E-02	6,26E-01	0,00E+00	5,76E-02	9,16E-01	ND	ND	ND	ND	3,88E-02	6,63E-03	3,75E-02	1,59E-03	-1,56E-04

ADPE = Abiotic Depletion Potential for non-fossil resources
 ADPF = Abiotic Depletion Potential for fossil resources
 GWP = Global Warming Potential
 ODP = Depletion potential of the stratospheric ozone layer
 POCP = Formation potential of tropospheric ozone photochemical oxidants
 AP = Acidification Potential of land and water
 EP = Eutrophication Potential
 HTP = Human Toxicity Potential
 FAETP = Fresh water aquatic ecotoxicity potential
 MAETP = Marine aquatic ecotoxicity potential
 TETP = Terrestrial ecotoxicity potential
 ECI = Environmental Cost Indicator
 ADPF = Abiotic Depletion Potential for fossil resources





ENVIRONMENTAL IMPACT per functional unit or declared unit (core indicators A2)

Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq.	0,00E+00	2,02E+00	-8,77E+01	-8,57E+01	3,92E+00	1,91E+02	0,00E+00	1,80E+01	1,42E+02	ND	ND	ND	3,95E+00	1,00E+00	2,69E+01	2,82E-01	2,13E+00
GWP-fossil	kg CO ₂ eq.	0,00E+00	2,01E+00	3,58E+01	3,79E+01	3,90E+00	6,51E+01	0,00E+00	1,40E+01	1,41E+02	ND	ND	ND	3,94E+00	1,00E+00	2,68E+01	2,82E-01	2,15E+00
GWP-biogenic	kg CO ₂ eq.	0,00E+00	6,19E-04	-1,25E+02	-1,25E+02	1,27E-03	1,26E+02	0,00E+00	3,23E-02	7,61E-01	ND	ND	ND	7,68E-03	3,26E-04	1,61E-01	2,31E-04	7,92E-03
GWP-luluc	kg CO ₂ eq.	0,00E+00	6,38E-03	1,33E+00	1,34E+00	1,39E-02	6,99E-02	0,00E+00	3,97E+00	1,79E-01	ND	ND	ND	1,49E-03	3,57E-03	9,67E-03	7,01E-05	-2,14E-02
ODP	kg CFC11 eq.	0,00E+00	3,51E-08	1,00E-06	1,04E-06	6,94E-08	2,03E-06	0,00E+00	4,22E-07	7,53E-06	ND	ND	ND	1,24E-07	1,78E-08	4,28E-07	4,26E-09	-3,34E-07
AP	mol H ⁺ eq.	0,00E+00	1,68E-02	1,51E-01	1,68E-01	1,87E-02	1,76E-01	0,00E+00	5,10E-02	1,01E+00	ND	ND	ND	9,11E-03	4,79E-03	4,25E-02	9,91E-04	-7,77E-02
EP-freshwater	kg P eq.	0,00E+00	1,83E-05	2,70E-03	2,72E-03	3,88E-05	2,65E-03	0,00E+00	5,60E-04	3,88E-03	ND	ND	ND	1,64E-04	9,95E-06	2,19E-04	1,98E-06	-3,69E-04
EP-marine	kg N eq.	0,00E+00	5,28E-03	4,91E-02	5,43E-02	7,10E-03	4,45E-02	0,00E+00	4,20E-02	1,86E-01	ND	ND	ND	1,91E-03	1,82E-03	8,57E-03	4,34E-04	-2,50E-02
EP-terrestrial	mol N eq.	0,00E+00	5,72E-02	4,86E-01	5,44E-01	7,57E-02	5,15E-01	0,00E+00	1,80E-01	2,15E+00	ND	ND	ND	2,27E-02	1,94E-02	9,56E-02	4,11E-03	-5,21E-01
POCP	kg NMVOC eq.	0,00E+00	1,78E-02	2,00E-01	2,18E-01	2,59E-02	1,55E-01	0,00E+00	3,27E-02	6,59E-01	ND	ND	ND	6,89E-03	6,63E-03	3,06E-02	1,60E-03	-6,28E-02
ADP-minerals & metals	kg Sb eq.	0,00E+00	5,69E-06	2,23E-04	2,29E-04	1,22E-05	5,69E-04	0,00E+00	8,12E-05	9,89E-04	ND	ND	ND	3,57E-05	3,13E-06	1,98E-04	2,10E-07	2,53E-03
ADP-fossil	MJ net calorific value	0,00E+00	2,83E+01	5,60E+02	5,88E+02	5,59E+01	9,30E+02	0,00E+00	9,56E+01	1,83E+03	ND	ND	ND	5,70E+01	1,43E+01	7,77E+01	3,40E+00	1,84E+01
WDP	m ³ world Deprived	0,00E+00	1,43E-01	1,29E+01	1,30E+01	3,05E-01	9,23E+00	0,00E+00	8,61E+00	3,46E+01	ND	ND	ND	5,46E-01	7,82E-02	1,48E+00	3,65E-02	2,12E+01

GWP-total = Global Warming Potential total

GWP-fossil = Global Warming Potential fossil fuels

GWP-biogenic = Global Warming Potential biogenictotal

GWP-luluc = Global Warming Potential land use and land use change

ODP = Depletion potential of the stratospheric ozone layer

AP = Acidification Potential, Accumulated Exceedence

EP-freshwater = Eutrophication Potential, fraction of nutrients reaching freshwater end compartment

EP-marine = Eutrophication Potential, fraction of nutrients reaching marine end compartment

EP-terrestrial = Eutrophication Potential, Accumulated Exceedence

POCP = Formation potential of tropospheric ozone photochemical oxidants

ADP-minerals & metals = Abiotic Depletion Potential for non-fossil resources [1]

ADP-fossil = Abiotic Depletion for fossil resources potential [1]

WDP = Water (user) deprivation potential, deprivation-weighted water consumption [1]

Disclaimer [1]:

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.





ENVIRONMENTAL IMPACT per functional unit or declared unit (additional indicators A2)

Unit		A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PM	Disease incidence	0,00E+00	1,79E-07	2,25E-06	2,43E-06	3,85E-07	1,08E-06	0,00E+00	7,12E-07	1,14E-05	ND	ND	ND	ND	4,15E-08	9,88E-08	6,49E-07	2,22E-08	-1,34E-06
IRP	kBq U235 eq.	0,00E+00	1,04E-02	1,12E+00	1,13E+00	2,18E-02	2,08E+00	0,00E+00	1,82E-01	3,80E+00	ND	ND	ND	ND	1,30E-01	5,59E-03	2,16E-01	2,04E-03	2,88E-01
ETP-fw	CTUe	0,00E+00	2,00E+01	2,43E+02	2,63E+02	4,13E+01	1,84E+02	0,00E+00	2,07E+02	1,12E+03	ND	ND	ND	ND	9,25E+00	1,06E+01	1,92E+02	9,61E+00	4,73E+02
HTP-c	CTUh	0,00E+00	1,04E-09	1,66E-07	1,67E-07	2,07E-09	4,58E-08	0,00E+00	1,93E-08	9,47E-08	ND	ND	ND	ND	1,31E-09	5,30E-10	9,16E-09	7,56E-11	2,14E-08
HTP-nc	CTUh	0,00E+00	2,09E-08	4,27E-07	4,48E-07	4,49E-08	8,16E-07	0,00E+00	2,88E-07	1,68E-06	ND	ND	ND	ND	4,78E-08	1,15E-08	2,54E-07	1,20E-09	6,03E-07
SQP	-	0,00E+00	1,98E+01	1,09E+04	1,09E+04	4,41E+01	5,45E+02	0,00E+00	3,19E+02	6,17E+02	ND	ND	ND	ND	1,23E+01	1,13E+01	6,43E+01	6,67E+00	-2,50E+03

PM = Potential incidence of disease due to PM emissions

IRP = Potential Human exposure efficiency relative to U235 [1]

ETP-fw = Potential Comparative Toxic Unit for ecosystems [2]

HTP-c = Potential Comparative Toxic Unit for humans, cancer [2]

HTP-nc = Potential Comparative Toxic Unit for humans, non-cancer [2]

SQP = Potential soil quality index [2]

Disclaimer [1]:

- This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste.

Disclaimer [2]:

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.





OUTPUT FLOWS AND WASTE CATEGORIES per functional unit or declared unit (A1 en A2)

Unit		A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HWD	kg	0,00E+00	1,75E-04	2,20E-03	2,37E-03	3,56E-04	8,77E-03	0,00E+00	4,31E-04	1,12E-02	ND	ND	ND	ND	1,84E-04	9,14E-05	1,89E-01	1,58E-05	2,21E-01
NHWD	kg	0,00E+00	1,64E+00	7,92E+00	9,56E+00	3,69E+00	8,00E+01	0,00E+00	4,03E+01	5,48E+01	ND	ND	ND	ND	2,09E-01	9,47E-01	1,13E+01	2,00E+01	1,42E+00
RWD	kg	0,00E+00	6,05E-06	9,23E-04	9,29E-04	1,28E-05	1,82E-03	0,00E+00	1,48E-04	2,85E-03	ND	ND	ND	ND	1,14E-04	3,28E-06	1,63E-04	1,21E-06	1,85E-04
CRU	kg	0,00E+00	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00								
MFR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,05E+00	0,00E+00	0,00E+00	4,29E+01	ND	ND	ND	ND	0,00E+00	0,00E+00	7,31E+01	0,00E+00	0,00E+00
MER	kg	0,00E+00	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00								
EEE	MJ	0,00E+00	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,85E+02								
ETE	MJ	0,00E+00	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,19E+02								

HWD = Hazardous Waste Disposed

NHWD = Non Hazardous Waste Disposed

RWD = Radioactive Waste Disposed

CRU = Components for reuse

MFR = Materials for recycling

MER = Materials for energy recovery

EEE = Exported Electrical Energy

ETE = Exported Thermal Energy





RESOURCE USE per functional unit or declared unit (A1 and A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	0,00E+00	3,75E-01	9,85E+02	9,85E+02	7,90E-01	1,88E+02	0,00E+00	1,70E+02	1,31E+02	ND	ND	ND	ND	1,02E+01	2,03E-01	8,58E+00	9,15E-02	-6,00E+02
PERM	MJ	0,00E+00	0,00E+00	1,05E+03	1,05E+03	0,00E+00	3,15E+01	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
PERT	MJ	0,00E+00	3,75E-01	2,03E+03	2,03E+03	7,90E-01	2,19E+02	0,00E+00	1,70E+02	1,31E+02	ND	ND	ND	ND	1,02E+01	2,03E-01	8,58E+00	9,15E-02	-6,00E+02
PENRE	MJ	0,00E+00	2,83E+01	5,61E+02	5,89E+02	5,60E+01	9,30E+02	0,00E+00	1,01E+02	1,77E+03	ND	ND	ND	ND	5,70E+01	1,43E+01	7,77E+01	3,40E+00	2,27E+01
PENRM	MJ	6,25E+01	0,00E+00	0,00E+00	6,25E+01	0,00E+00	1,88E+00	0,00E+00	0,00E+00	6,25E+01	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-4,33E+00
PENRT	MJ	6,25E+01	2,83E+01	5,61E+02	6,52E+02	5,60E+01	9,32E+02	0,00E+00	1,01E+02	1,83E+03	ND	ND	ND	ND	5,70E+01	1,43E+01	7,77E+01	3,40E+00	1,83E+01
SM	kg	1,00E+02	0,00E+00	0,00E+00	1,00E+02	0,00E+00	3,01E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00								
NSRF	MJ	0,00E+00	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00								
FW	m3	0,00E+00	6,26E-03	4,48E-01	4,54E-01	1,35E-02	5,11E-01	0,00E+00	3,91E-01	1,05E+00	ND	ND	ND	ND	2,96E-02	3,46E-03	6,40E-02	3,71E-03	5,44E-01

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials

PERM = Use of renewable primary energy resources used as raw materials

PERT = Total use of renewable primary energy resources

PENRE = Use of non-renewable primary energy resources excluding non-renewable energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total use of non-renewable primary energy resources

SM = Use of secondary materials

RSF = Use of renewable secondary fuels

NSRF = Use of non-renewable secondary fuels

FW = Use of net fresh water

BIOGENIC CARBON CONTENT per functional unit or declared unit (A1 and A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
BBCpr	kg C	0,00E+00																	
BCCpa	kg C	0,00E+00	0,00E+00	1,25E+02	1,25E+02	0,00E+00													

BCCpr = Biogenic carbon content in product

BCCpa = Biogenic carbon content in packaging





CALCULATION RULES

CUT-OFF CRITERIA

There is no cut-off applied for the inputs or outputs of any of the processes.

TIME PERIOD DATA COLLECTION

Background data is primarily based on Ecoinvent 3.9.1 (Ecoinvent 3.6 for set 1). Foreground data is <2 years and background data <10 years. The data quality is considered to be good.

Material quantities: design specific

Suppliers: FY2024

Factory: FY2024

Building site: following CWCT

Emissions: n/a

Fiscal Year 2024 (referred to FY2024 henceforth) refers to the financial year starting from 1st of April 2023, and ending on 31st of March 2024.

ALLOCATION

Allocation is applied for recycling at end-of-life of various materials according to EN 15804 rules.

SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION

Life cycle stages A1-A3 (production)

Scheldebouw B.V. will handle the windows in their factory in Middelburg. The complete windows are harvested from a high-end project in London, transported to Middelburg and enter the factory to be inspected for any damages or defects. The cleaned facade elements are then packed in especially developed wooden crates and made ready for transport to the building site in The Netherlands.

All secondary materials are included in stage A1 of this LCA study free of burden. The transport movements between the donor project in London and Scheldebouw are included in stage A2 and all activities in the Scheldebouw refurbishment location in Middelburg are included in stage A3.

The required energy for production, external treatments, ancillary materials, packaging material and production emissions are included and the quantities are based on a test run.

Transportation from donor building to factory (stage A2)	Distance
Lorry (truck): London-Purfleet	31 km
Transoceanic ship: Purfleet-Rotterdam	282 km
Lorry (truck): Rotterdam-Middelburg	85 km
Total:	398 km

Life cycle stages A4-A5 (construction)

This stage consists of the transport of the product from the factory in Middelburg to the construction site in The Netherlands (default distance 150 km). It also includes the loss of material during construction (3%). The additional needed production, transport and end-of-life treatment of the lost material during construction is included. The end-of-life of packaging material up to the end-of-waste state or disposal of final residues is also included. The energy use for installation of the product is taken into account following the CWCT methodology.

The transport movements between Scheldebouw Middelburg and the building site are included in stage A4. All activities on the building site are included in stage A5.





PERMASTEELISA GROUP

Life cycle stages B1-B3 (use stage)

This stage consists of the impacts arising from components of the building and construction works during their use. The window itself is assumed to have negligible environmental impact during its use stage B1. Cleaning of the window needs to be done twice a year and is modelled in stage B2 following CWCT in accordance with EN 17074.

The window consists of various parts with different service lifetimes. During the reference service life (RSL) of the window (50 years) the glazing and gaskets will be replaced once (after approx. 25 years). The replacement of these parts has been accounted for in life cycle stage B3.

Product replacement (B4) and renovation (B5) are not considered. Operational water and energy use (B6-7) are not considered.

Life cycle stages C1-C4 (end of life)

When the end of the life stage of the building is reached, the de-construction/demolition begins. This EPD includes de-construction/demolition (C1), the necessary transport (C2) from the demolition site to the sorting location and distance to final disposal. The end of life stage includes the final disposal to landfill (C4), incineration (C3) and needed recycling processes up to the end-of-waste point (C3). Loads and benefits of recycling, re-use and exported energy are part of module D.

The default end-of-life scenarios of the annex (November 2020) to the NMD Determination method v1.1 have been used for the various materials in the product.

Life cycle stage D (benefits and loads beyond the system boundary)

This stage contains the potential loads and benefits of recycling and re-use of raw materials/products. The loads contain the needed recycling processes from end-of-waste-point up to the point-of-equivalence of the substituted primary raw material and a load for secondary material that will be lost at the end-of-life stage. The loads and benefits of recycling and reuse are included in this module. The benefits are calculated based on the primary content and the primary equivalent. In addition, the benefits of energy recovery are granted at this stage. The amount of avoided energy is based on the Lower Heating Values of the materials and the efficiencies of the incinerators as mentioned in the NMD Determination method v1.1 or Ecoinvent 3.9.1 (2019).

DECLARATION OF SVHC

The product does not contain any substances listed in the "Candidate List of Substances of Very High Concern (SVHC) for authorisation" exceeding 0.1% of the weight of the product.

REFERENCES

CWCT

Centre for Window and Cladding Technology

"How to calculate the embodied carbon of facades: A methodology", Issue 1, September 2022

EN 15804+A2

EN 15804+A2: 2019: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

ISO 14040

ISO 14040:2006-10, Environmental management - Life cycle assessment - Principles and framework; EN ISO 14040:2006

ISO 14044

ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines; EN ISO 14040:2006

ISO 14025

ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

NMD

Nationale Milieu Database (Dutch National Environmental Database) Determination method v1.2

MRPI verification protocol

MRPI®-EPD verification protocol November 2020.v4.0

REMARKS

This declaration is only valid for the specific design of this project and facade type.



Page 12 of 12

